Turbine/Engine Emulator Function Set 579783 (8968-30)



LabVolt Series

Datasheet

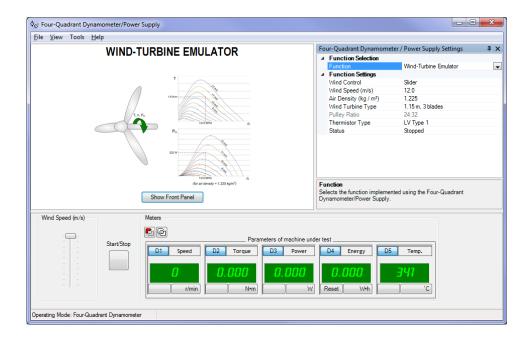


Table of Contents

General Description	_ 3
Specifications	_ 3

© Festo Didactic 2

General Description

The Turbine/Engine Emulator Function Set is a package of control functions that can be activated in the Four-Quadrant Dynamometer/Power Supply, enabling the module to emulate the operation of various types of turbines and engines.

The control functions in the set are only available in computer-based mode. This means that the function performed by the Four-Quadrant Dynamometer/Power Supply is selected, set, and monitored using the LVDAC-EMS software. The following control functions are available in the set:

Dynamometer operating mode

- Small Wind-Turbine Emulator: this function makes the permanent-magnet dc motor of the Four-Quadrant Dynamometer/Power Supply faithfully reproduce the effect of wind on the bladed rotor of a small-scale wind turbine. The torque-speed characteristic at the shaft of the machine coupled to the Four-Quadrant Dynamometer/Power Supply is the same as the one that is obtained when wind blows at a certain speed on the rotor of the actual wind turbine. The user has control over the wind speed and air density.
- Hydraulic Turbine Emulator: this function uses the permanent-magnet dc motor of the Four-Quadrant Dynamometer/Power Supply to recreate the behavior of an hydraulic turbine with a synchronous generator. The torque-speed characteristics at the shaft of the machine coupled to the Four-Quadrant Dynamometer/Power Supply is the same as that of a Francis-type hydraulic turbine. The user has control over the vane angle (manually or through the module analog input), the vane variation speed, and the inertia.
- Engine Emulator: this function uses the permanent-magnet dc motor of the Four-Quadrant Dynamometer/ Power Supply to recreate the behavior of a diesel engine with a synchronous generator. The torque-speed characteristics at the shaft of the machine coupled to the Four-Quadrant Dynamometer/Power Supply is the same as a diesel generator. The user has control over the fuel rack position (%) (manually or through the module analog input) and the inertia.

Specifications

Parameter	Value
Control Functions	
Control Functions	Wind-Turbine Emulator
	Hydraulic-Turbine Emulator
	Engine Emulator
Wind-Turbine Emulator	
Wind Control	Software slider or 8960 command input
Wind Speed	3-12 m/s (6.7-26.8 mph)
Air Density	1.12-1.44 kg/m³ (0.07-0.09 lb/ft³)
Wind Turbine Type	1.15 m with 3 blades, 1.15 m with 3 blades and gearbox, 0.72 m with 3 blades and passive stall
Inertia J	0.02-0.4 kg·m² (0.475-9.492 lb·ft²) (only available for certain wind turbine types)
Gear Ratio R	0.5-2 (only available for certain wind turbine types)
Hydraulic-Turbine Emulator	
Vane Control	Software slider or 8960 command input
Turbine Type	300 W Francis
Vane Maximal Speed	0-100%/s
Runner Inertia	0.005-1 kg·m² (7.119 lb·ft²)
Engine Emulator	
Fuel Rack Position Control	Software slider or 8960 command input
Engine Type	300 W Diesel
Fuel Rack Position	0-100%
Engine Inertia	0.005-1 kg·m² (7.119 lb·ft²)

3 © Festo Didactic

Reflecting the commitment of Festo Didactic to high quality standards in product, design, development, production, installation, and service, our manufacturing and distribution facility has received the ISO 9001 certification.

Festo Didactic reserves the right to make product improvements at any time and without notice and is not responsible for typographical errors. Festo Didactic recognizes all product names used herein as trademarks or registered trademarks of their respective holders. © Festo Didactic Inc. 2024. All rights reserved.

Festo Didactic SE

Rechbergstrasse 3 73770 Denkendorf Germany

P. +49(0)711/3467-0 F. +49(0)711/347-54-88500

Festo Didactic Inc.

607 Industrial Way West Eatontown, NJ 07724 United States

P. +1-732-938-2000 F. +1-732-774-8573

Festo Didactic Ltée/Ltd

675 rue du Carbone Québec QC G2N 2K7 Canada

P. +1-418-849-1000 F. +1-418-849-1666

www.labvolt.com

www.festo-didactic.com

© Festo Didactic 4