


Power Electronics Training System

579314 (8010-A0)

FESTO

LabVolt Series

Datasheet

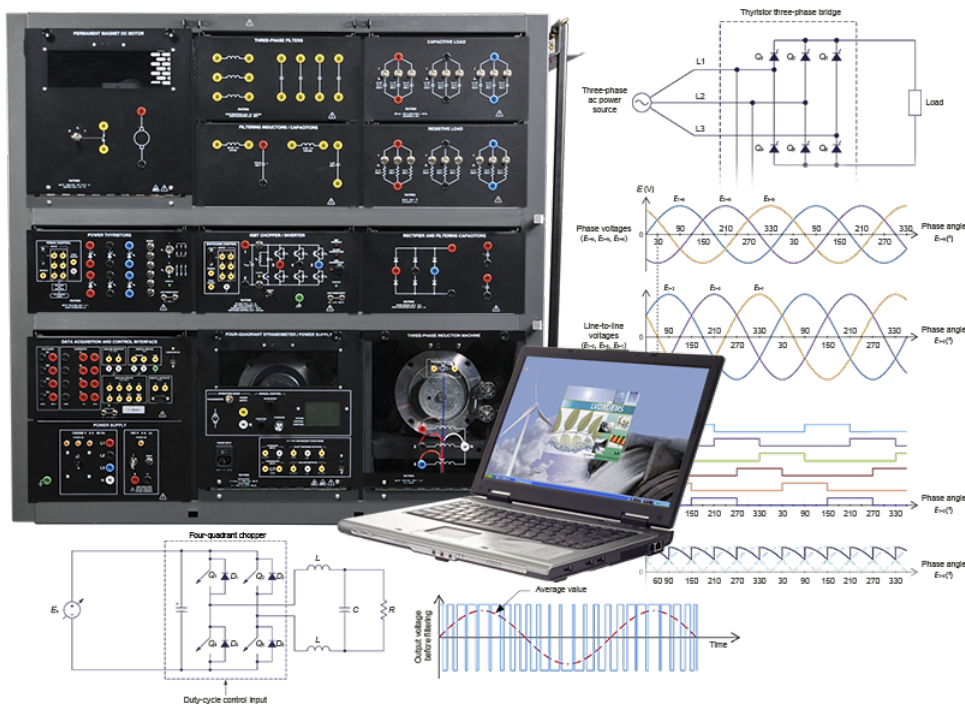

* The product images shown in this document are for illustration purposes; actual products may vary. Please refer to the Specifications section of each product/item for all details. Festo Didactic reserves the right to change product images and specifications at any time without notice.

Festo Didactic
en 120 V - 60 Hz
04/2025

Table of Contents

General Description	3
Courseware	4
Modular Design Approach	5
Features & Benefits	5
List of Equipment	6
List of Manuals	7
Table of Contents of the Manual(s)	7
Additional Equipment Required to Perform the Exercises (Purchased separately)	8
Additional Equipment Required to Perform the Exercises (Purchased separately)	8
Additional Equipment Required to Perform the Exercises (Purchased separately)	8
Additional Equipment Required to Perform the Exercises (Purchased separately)	9
Additional Equipment Required to Perform the Exercises (Purchased separately)	9
Additional Equipment Required to Perform the Exercises (Purchased separately)	9
Additional Equipment Required to Perform the Exercises (Purchased separately)	9
Additional Equipment Required to Perform the Exercises (Purchased separately)	9
Additional Equipment Required to Perform the Exercises (Purchased separately)	9
Additional Equipment Required to Perform the Exercises (Purchased separately)	9
Additional Equipment Required to Perform the Exercises (Purchased separately)	9
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	10
Additional Equipment Required to Perform the Exercises (Purchased separately)	11
Additional Equipment Required to Perform the Exercises (Purchased separately)	11
Additional Equipment Required to Perform the Exercises (Purchased separately)	11
Additional Equipment Required to Perform the Exercises (Purchased separately)	11
Additional Equipment Required to Perform the Exercises (Purchased separately)	11
Additional Equipment Required to Perform the Exercises (Purchased separately)	11
Additional Equipment Required to Perform the Exercises (Purchased separately)	11
Software	11
System Specifications	12
Equipment Description	13
Optional Equipment Description	47

General Description

The Power Electronics Training System combines a modular design approach with computer-based data acquisition and control to provide unrivaled training in power electronics to students already having a sound knowledge of basic electric power technology. The system features the Four-Quadrant Dynamometer/Power Supply and the Data Acquisition and Control Interface, two state-of-the-art USB peripherals that greatly enhance the learning experience of students.

Training begins with the following four courses:

- DC Power Electronics
- Single-Phase AC Power Electronics
- Three-Phase AC Power Electronics
- Thyristor Power Electronics

These courses introduce the student to the most common power electronic components (power diode, thyristor, and power transistor) as well as to many power electronic devices used in numerous applications today (power diode single-phase and three-phase rectifiers, choppers, single-phase and three-phase inverters, thyristor single-phase and three-phase bridges, solid-state relays or SSRs, and thyristor ac power controllers). Training continues with the following three courses which deal with common industrial applications using power electronics:

- DC Motor Drives
- Three-Phase Motor Drives
- Three-Phase Induction Motor Starters


The following two courses from the Electric Power Technology Training Program, can be optionally added to the Power Electronics Training System to enhance student training in power electronic applications:

- Hydropower Electricity Generation
- High-Voltage DC Transmission Systems

These two courses familiarize the student with the use of hydropower to produce electrical power using synchronous generators, as well as with the transmission of large amounts of electrical power using high-voltage, direct-current (HVDC) lines, two advanced applications using thyristor power electronics.


The Power Electronics Training System is part of the Electric Power Technology Training Systems, Series 8010. Each training system in Series 8010 is based on the Electric Power Technology Training Program and provides a turn-key solution dealing with some aspects of the wide field of electrical energy. The exhaustive courseware provided with each training system covers all the theory required to perform the laboratory exercises, while review questions and unit tests allow students to test the knowledge they have gained.

The Electric Power Technology Training Program is highly modular in both courseware and hardware. Because of this, courses and equipment from the program are available as required, either individually or in the context of a specific training system. The program covers several different subjects in the field of electrical energy, such as rotating machines, electrical power transmission, power electronics, home energy production from renewable resources (wind and sunlight), large-scale electricity production from hydropower and wind power, smart-grid technologies (SVC, STATCOM, HVDC transmission, etc.), storage of electrical energy in batteries, and drive systems for small electric vehicles and cars.

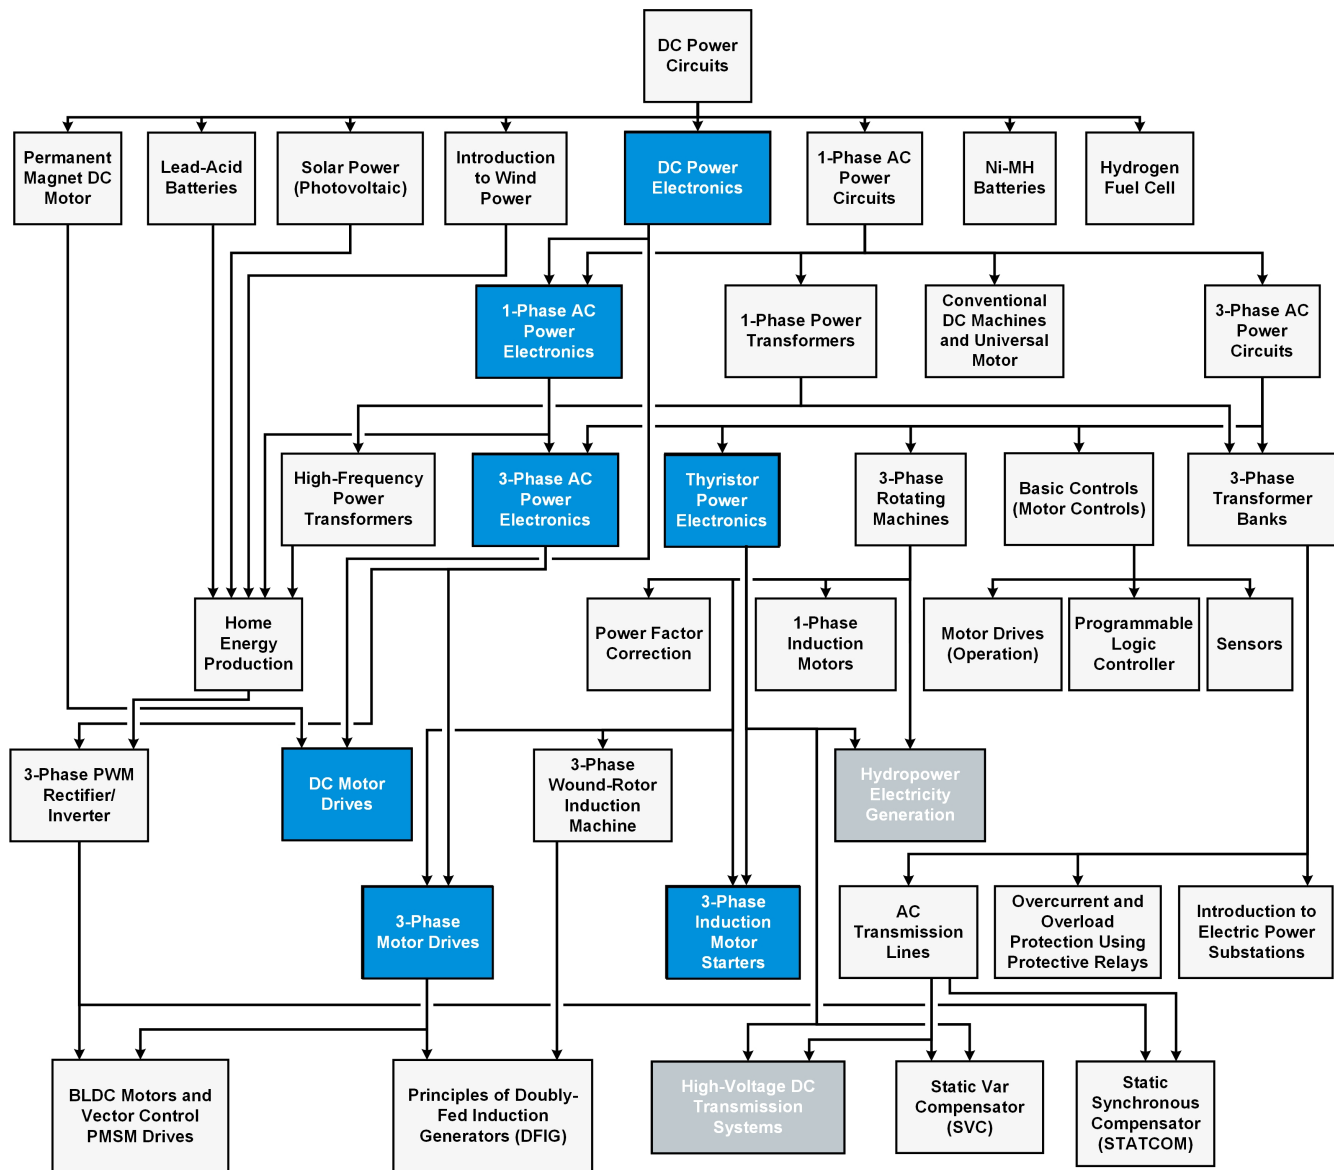

The above chart shows all courses in the Electric Power Technology Training Program. Blue boxes highlight courses included in the training system covered in this datasheet, while dark grey boxes, if any, highlight courses that can be optionally added to this training system.

Courseware

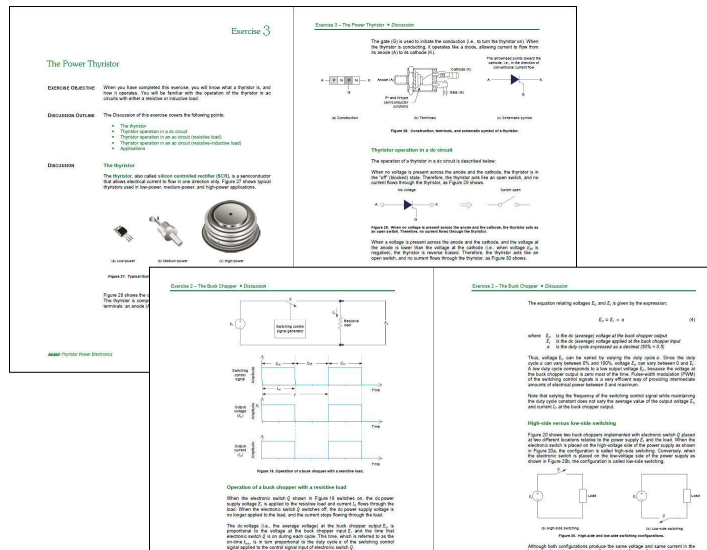

Each course in the training system includes a full-color student manual providing all the theoretical matter required, guided lab-exercise procedures to be performed with the training equipment, and review questions that test the knowledge gained by the student. Whenever possible, each course is built to bring the student to actual applications as soon as possible. A full-color instructor guide providing all lab results and answers to questions is also included with each course.

Modular Design Approach



The modular approach for designing the training program and lab equipment enables instructors to start building their electrical-energy laboratory with a basic package of courses and equipment and add new courses and equipment over time without needless duplication of equipment.

All lab equipment consists of modules that can be inserted into a workstation. Module dimensions vary

between two standard EMS sizes: full-size and half-size. Symbols and diagrams representing the electrical components in each module are clearly silk-screened on the front panel. Standard, color-coded safety banana jacks are used to provide access to the various components in each module.

Features & Benefits

- The training system teaches the principles of dc and ac power electronics. To this end, students follow a complete curriculum that includes these topics:
 - Courses that cover the operation of various power electronics devices, both dc and ac, as well as single-phase and three-phase.
 - Courses that cover a variety of common power electronics applications, such as dc motor drives, three-phase motor drives, and three-phase induction motor starters.
 - Optional courses that cover advanced applications of power electronics, such as hydropower electricity generation, and HVDC transmission systems.
- All control of power electronics devices is computerized via the LVDAC-EMS software, allowing for user-friendly operation, high configurability, and ease of monitoring.
- Video presentations of several power electronics control functions used in the training system are available on Youtube.
- The course curriculum of the Electric Power Technology Training Program is highly flexible and allows a multitude of different customized training solutions.
- The courseware includes student manuals and instructor guides with all the theory required to perform the hands-on experiments.
- All workstations, modules, and components are sturdy and protected against electrical damage to ensure a prolonged service life in a demanding environment such as a training laboratory.
- The modular design approach of the training equipment allows a large variety of courses to be performed using a small number of modules, without unnecessary duplication of equipment.
- All electrical components can be interconnected without electric shock hazard since all live parts of the connection leads are concealed and insulated.
- All electrical symbols representing the components used in a laboratory exercise are clearly silk-screened on the front panel of the modules.
- The training system includes two highly versatile USB peripherals:
 - Four-Quadrant Dynamometer/Power Supply, Model 8960-2. This module is used as a dc power source and a battery charger/discharger with a large variety of configurable parameters. It can also be used as an overnight battery float charger.

- Data Acquisition and Control Interface, Model 9063. This module gives access to a large variety of computer-based measuring instruments and is used to control the various dc power electronics devices. All functions are implemented via the LVDAC-EMS software.
- The training system also includes three highly versatile power electronics modules controlled using the Data Acquisition and Control Interface:
 - IGBT Chopper/Inverter, Model 8837-B. This module is used to implement various types of choppers and inverters.
 - Power Thyristors, Model 8841. This module is used to implement various thyristor-based devices (e.g., bridges, ac power controllres, solid-state relays)
 - Rectifier and Filtering Capacitors, Model 8842-A. This module is used to implement various types of power diode rectifiers.
- Software upgrades for LVDAC-EMS and firmware upgrades for the Four-Quadrant Dynamometer/Power Supply and Data Acquisition and Control Interface are available for download free of charge on the Festo Didactic website.

List of Equipment

Qty	Description	Model number
1	DC Motor Drives (Instructor Guide) _____	8113740 (81137-40)
1	DC Motor Drives (Student Manual) _____	8113742 (81137-42)
1	DC Power Electronics (Student Manual) _____	579358 (86356-00)
1	DC Power Electronics (Instructor Guide) _____	579360 (86356-10)
1	Single-Phase AC Power Electronics (Student Manual) _____	579370 (86359-00)
1	Single-Phase AC Power Electronics (Instructor Guide) _____	579372 (86359-10)
1	Three-Phase AC Power Electronics (Student Manual) _____	579393 (86362-00)
1	Three-Phase AC Power Electronics (Instructor Guide) _____	579395 (86362-10)
1	Thyristor Power Electronics (Student Manual) _____	579402 (86363-00)
1	Thyristor Power Electronics (Instructor Guide) _____	579403 (86363-10)
1	Three-Phase Motor Drives (Student Manual) _____	579426 (86368-00)
1	Three-Phase Motor Drives (Instructor Guide) _____	579427 (86368-10)
1	Three-Phase Motor Starters (Student Manual) _____	579462 (88197-00)
1	Three-Phase Motor Starters (Instructor Guide) _____	579463 (88197-10)
1	Tabletop Workstation _____	579484 (8134-20)
1	Permanent Magnet DC Motor _____	8114247 (8213-10)
1	Four-Pole Squirrel Cage Motor _____	586267 (8221-20)
1	Resistive Load _____	763359 (8311-00)
1	Filtering Inductors/Capacitors _____	579523 (8325-A0)
1	Three-Phase Filter _____	579529 (8326-00)
1	Capacitive Load _____	763366 (8331-00)
1	Three-Phase Transformer Bank _____	579559 (8348-40)
1	Synchronizing Module / Three-Phase Contactor _____	8204391 (8621-B0)
1	Lead-Acid Battery Pack _____	579591 (8802-10)
1	Three-Phase Power Supply _____	579612 (8823-00)
1	IGBT Chopper/Inverter _____	579623 (8837-B0)
1	Power Thyristors _____	763376 (8841-20)
1	Rectifier and Filtering Capacitors _____	579630 (8842-A0)
1	Timing Belt _____	579637 (8942-00)
1	Connection Lead Set _____	579638 (8951-L0)

Qty	Description	Model number
1	Four-Quadrant Dynamometer/Power Supply _____	579662 (8960-E0)
1	Data Acquisition and Control Interface _____	579686 (9063-D0)
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20)

List of Manuals

Description	Manual number
DC Power Electronics (Workbook) _____	579358 (86356-00)
DC Power Electronics (Workbook (Instructor)) _____	579360 (86356-10)
Single-Phase AC Power Electronics (Workbook) _____	579370 (86359-00)
Single-Phase AC Power Electronics (Workbook (Instructor)) _____	579372 (86359-10)
Three-Phase AC Power Electronics (Workbook) _____	579393 (86362-00)
Three-Phase AC Power Electronics (Workbook (Instructor)) _____	579395 (86362-10)
Thyristor Power Electronics (Workbook) _____	579402 (86363-00)
Thyristor Power Electronics (Workbook (Instructor)) _____	579403 (86363-10)
Three-Phase Motor Drives (Workbook) _____	579426 (86368-00)
Three-Phase Motor Drives (Workbook (Instructor)) _____	579427 (86368-10)
Three-Phase Induction Motor Starters (Workbook) _____	579462 (88197-00)
Three-Phase Induction Motor Starters (Workbook (Instructor)) _____	579463 (88197-10)
Electric Power Technology Training Equipment (User Guide) _____	584778 (38486-E0)
Computer-Based Instruments for EMS (User Guide) _____	585219 (86718-E0)
DC Motor Drives (Workbook (Instructor)) _____	8113740 (81137-40)
DC Motor Drives (Workbook) _____	8113742 (81137-42)

Table of Contents of the Manual(s)

DC Power Electronics (Workbook) (579358 (86356-00))

- 1 The Diode and Switching Transistor
- 2 The Buck Chopper
- 3 Introduction to High-Speed Power Switching
- 4 Ripple in Choppers
- 5 The Lead-Acid Battery Charger
- 6 The Boost Chopper
- 7 The Buck/Boost Chopper
- 8 The Four-Quadrant Chopper

Single-Phase AC Power Electronics (Workbook) (579370 (86359-00))

- 1 Power Diode Single-Phase Rectifiers
- 2 The Single-Phase PWM Inverter

Three-Phase AC Power Electronics (Workbook) (579393 (86362-00))

- 1 Power Diode Three-Phase Rectifiers
- 2 The Single-Phase PWM Inverter with Dual-Polarity DC Bus
- 3 The Three-Phase PWM Inverter

Thyristor Power Electronics (Workbook) (579402 (86363-00))

- 1 Power Diode Single-Phase Rectifiers
- 2 Power Diode Three-Phase Rectifiers
- 3 The Power Thyristor

- 4 The Solid State Relay
- 5 Single-Phase AC Power Control
- 6 Three-Phase AC Power Control
- 7 Thyristor Three-Phase Rectifier/Inverter

Three-Phase Motor Drives (Workbook) (579426 (86368-00))

- 1 Three-Phase, Variable-Frequency Induction-Motor Drive
- 2 Three-Phase, Variable-Frequency Induction-Motor Drive with Constant V/f ratio

Three-Phase Induction Motor Starters (Workbook) (579462 (88197-00))

- 1 DOL Starters and Soft Starters
- 2 Advanced Features of Soft Starters

Electric Power Technology Training Equipment (User Guide) (584778 (38486-E0))

- 1 General Safety Recommendations
- 2 System Power Requirements
- 3 Quick Start Installation Guide
- 4 Equipment Installation
- 5 Modules Handling, Installation, and Removal
- 6 Equipment Maintenance
- A Connection of the Power Supply to the AC Power Network
- B Description, Specifications, and Operation of the EMS Modules

Computer-Based Instruments for EMS (User Guide) (585219 (86718-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ²

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ³

¹ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

² The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

³ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ⁴

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ⁵

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ⁶

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ⁸

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ⁹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹⁰

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹¹

⁴ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

⁵ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

⁶ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

⁷ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

⁸ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

⁹ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹⁰ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹¹ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹²

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹⁴

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹⁵

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹⁶

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹⁸

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ¹⁹

¹² The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹³ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹⁴ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹⁵ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹⁶ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹⁷ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹⁸ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

¹⁹ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ²⁰

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ²¹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ²²

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ²³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ²⁴

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Digital Multimeter _____	579782 (8946-20) ²⁵

Software

Qty	Description	Model number
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 1 User Online, 1 year ____	586971 (8972-00) ²⁶
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 5 Users Online, 1 year ____	586974 (8972-A0) ²⁷

²⁰ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

²¹ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

²² The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

²³ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

²⁴ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

²⁵ The data acquisition already includes this function and many more, but the DC Circuits manual references using multimeters.

²⁶ Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

²⁷ Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

Qty	Description	Model number
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 10 Users Online, 1 year	586977 (8972-B0) ²⁸
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 15 Users Online, 1 year	586980 (8972-C0) ²⁹
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 20 Users Online, 1 year	586983 (8972-D0) ³⁰
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 25 Users Online, 1 year	586986 (8972-E0) ³¹
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 30 Users Online, 1 year	586989 (8972-F0) ³²
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 35 Users Online, 1 year	586992 (8972-G0) ³³
1	Electromechanical Systems Simulation Software (LVSIM [®] -EMS) - 40 Users Online, 1 year	586995 (8972-H0) ³⁴
1	SCADA for LVDAC-EMS	8094377 (8973-00) ³⁵
1	Software Development Kit (SDK)	581459 (9069-90) ³⁶

System Specifications

Parameter	Value
System Requirements	
Maximum Current	10 A
Typical Current	1.5 A per student group
AC Power Network Installation	3 phases (120/208 V – 60 Hz), star (wye) configuration including neutral and ground wires, protected by a 20 A circuit breaker
AC Power Network Connector	NEMA L21-20
Computer Requirements	A currently available personal computer with USB 2.0 ports, running under one of the following operating systems: Windows [®] 7 or Windows [®] 8.
Physical Characteristics	
Intended Location	On a table able to support the weight of the workstation and installed equipment

²⁸ Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

²⁹ Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

³⁰ Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

³¹ Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

³² Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

³³ Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

³⁴ Simulation software that covers DC, single-phase and 3 phase circuits as well as motors and generators and transmission lines. Doesn't cover power electronics.

³⁵ Software allowing the monitoring of up to 5 Stations through OPC.

³⁶ Additional firmware for the Data Acquisition.

Parameter	Value
Dimensions (H x W x D)	900 x 930 x 530 mm (35.4 x 36.6 x 20.9 in)
Net Weight	191 kg (420 lb)
EMS Modules	
Full-Size Dimensions (H x W x D)	308 x 287 x 440 mm (12.1 x 11.3 x 17.3 in)
Half-Size Dimensions (H x W x D)	154 x 287 x 440 mm (6.1 x 11.3 x 17.3 in)

Equipment Description

Tabletop Workstation 579484 (8134-20)



The Workstation is a fully assembled workstation that serves the same purpose as the Mobile Workstation but has no storage cabinet or pull-out work surface. This workstation is intended for use on a bench (not supplied) and is fitted with rubber feet to protect the bench top. Alternatively, this workstation can be mounted on either a Mobile Storage Cabinet, to make a Mobile Workstation, or on a Mobile Base, to make a mobile workstation without storage cabinet. In that case, it is possible to mount and lock a second Workstation, on top of the first Workstation to double the space available for EMS modules.

The Workstation consists of three rows of compartments designed to house EMS modules. Two of these rows have full-height compartments while the other row has half-height compartments. Each row of full-height compartments can

accommodate up to three full-size EMS modules or six half-size EMS modules whereas the row of half-height compartments can accommodate up to three half-size EMS modules.

Module Installation

The EMS modules are guided into position along stainless steel guide rails. Separators between each bay of the workstation ensure perfect alignment of the EMS modules and allow their easy insertion in the workstation. A holding mechanism ensures that each EMS module stays in place once it is installed in a compartment of the workstation. Front-mounted push levers allow all EMS modules on a single row to be released for easy removal.



Safety Padlock Bars

Two safety padlock bars on the front of the workstation prevent students from removing EMS modules during laboratory exercises. The bars can be removed and locked to the side of the workstation when the safety lock is not necessary.



Additional Information

Six holes in the rear panel of the workstation allow connection to a power supply, as well as the connection of 2 kW machines to their interconnection modules. Assembly of the workstation before painting ensures that each EMS module in the workstation is correctly grounded.

Manual

Description	Manual number
Electric Power Technology Training Equipment (User Guide)	584778 (38486-E0)

Table of Contents of the Manual(s)

Electric Power Technology Training Equipment (User Guide) (584778 (38486-E0))

- 1 General Safety Recommendations
- 2 System Power Requirements
- 3 Quick Start Installation Guide
- 4 Equipment Installation
- 5 Modules Handling, Installation, and Removal
- 6 Equipment Maintenance
- A Connection of the Power Supply to the AC Power Network
- B Description, Specifications, and Operation of the EMS Modules

Specifications

Parameter	Value
Physical Characteristics	
Intended Location	On a table able to support the weight of the workstation and installed equipment
Dimensions (H x W x D)	890 x 935 x 465 mm (35.0 x 36.8 x 18.3 in)
Net Weight	31.8 kg (70 lb)

Permanent Magnet DC Motor 8114247 (8213-10)



The Permanent Magnet DC Motor is a high-speed, brushed dc motor mounted in a full-size EMS module. The magnetic field required for motor operation is produced by powerful permanent magnets mounted on the motor stator. Connections to the motor are made through color-coded safety banana jacks located on the front panel on the module. Power to the motor must be fed by an external dc power source. A toggle switch mounted on the front panel can be used to switch dc power to the motor on and off when the motor is connected to a battery pack. When driven by a prime mover, the Permanent Magnet DC Motor operates as a dc generator.

The front panel of the Permanent Magnet DC Motor module can be opened to install a Timing Belt on the pulley of the motor shaft. This permits mechanical coupling of this motor to the Four-Quadrant Dynamometer/Power Supply. The diameter of the Permanent Magnet DC Motor pulley is smaller (12 teeth) than

that of the pulleys of the Four-Quadrant Dynamometer/Power Supply (24 teeth). This difference of pulley ratio (12 to 24) permits adapting the speed (0 4000 r/min) of the Permanent Magnet DC Motor to the speed of the Four-Quadrant Dynamometer/Power Supply (between 0 2000 r/min).

Specifications

Parameter	Value
Rating	
Power	220 W
Voltage	48 V
Current	5.5 A
Speed	3600 rpm
Maximum voltage	60 V
Maximum speed	4712 rpm
Pulley	
Number of teeth	12
Physical Characteristics	
Dimensions (H x W x D)	308 x 291 x 440 mm (2.1 x 11.5 x 17.3 in)
Net Weight	7.6 kg (16.8 lb)

Four-Pole Squirrel Cage Motor 586267 (8221-20)



The Four-Pole Squirrel-Cage Induction Motor is a 0.2 kW squirrel-cage induction machine mounted in a full-size EMS module. The machine stator windings are independently connected (six jacks), allowing connection in either wye or delta configuration. Connections to the machine are made through color-coded safety banana jacks located on the front panel on the module. The machine has a thermistor output that allows monitoring of the machine internal temperature to prevent overheating. A tensioner bearing can be ordered as an option.

The front panel of the Four-Pole Squirrel-Cage Induction Motor module can be opened to install a Timing Belt on the pulley of the machine shaft. This permits mechanical coupling of this machine to the Four-Quadrant Dynamometer/Power Supply. When driven by a prime mover, the Four-Pole Squirrel-Cage Induction Motor operates as a three-phase asynchronous generator.

Specifications

Parameter	Value
Motor	
Stator Voltage	120/208 V, 3-phase
Mechanical Power	200 W
Nominal Speed	1685 r/min
Nominal Current	1.14 A
Power factor	0.73
Generator	
Stator Voltage	120/208 V, 3-phase
Output Power	200 W
Nominal Speed	1900 r/min
Nominal Current	1.18 A
Power factor	0.47
Protection	
Type	10 kΩ thermistor, type 2, in the stator windings
Physical Characteristics	
Dimensions (H x W x D)	308 x 287 x 440 mm (12.1 x 11.3 x 17.3 in)
Net Weight	TBE

Resistive Load 763359 (8311-00)



The Resistive Load consists of a module housing nine wire-wound power resistors arranged in three identical banks. Each bank consists of three resistors connected in parallel that can be switched on or off with toggle switches to obtain various resistance values. This allows the total (equivalent) resistance of each bank to be increased or decreased by steps. Six safety banana jacks on the module front panel provide access to each resistor bank. The three resistor banks can be connected separately for operation in three-phase circuits. Also, the three


resistor banks can be connected together for operation in single-phase circuits.

The Resistive Load is commonly used in conjunction with other basic load modules, like the Inductive Load and the Capacitive Load to experiment with the effects of different types of loads on a circuit.

Specifications

Parameter	Value
Resistors	
Quantity	Three identical banks of three resistors
Resistance Values (Each Group)	300/600/1200 Ω
Nominal Voltage	120 V ac/dc
Resistance Value Accuracy	$\pm 5\%$
Load at Nominal Voltage (Each Bank)	
Power	12-84 W
Current	0.1-0.7 A
Steps	Seven, of equal increment
Current Increment	0.1 A
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 410 mm (6.1 x 11.3 x 16.1 in)
Net Weight	4.5 kg (9.9 lb)
Color	
Front panel color	Black

Filtering Inductors/Capacitors 579523 (8325-A0)

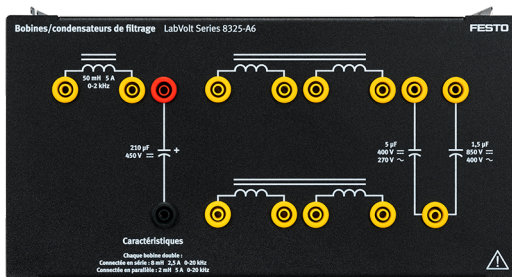


This Filtering Inductors/Capacitors module consists of two separate filters enclosed in a half-size EMS module: a low-frequency filter and a high-frequency filter. The low-frequency filter consists of an inductor and a polarized capacitor, while the high-frequency filter consists of two inductors and a non-polarized capacitor. Internal electrical components are identified on the module front panel. 4 mm banana jacks provide access to the different components in the module.

Specifications

Parameter	Value
Low Frequency Filter	
Inductance	50 mH - 5 A - 0-2 kHz
Capacitor (Aluminium Electrolytic)	210 μ F - 450 V
High Frequency Filter	
Inductance (2)	2 mH - 5 A - 0-20 kHz
Capacitor (Metallized Polypropylene)	5 μ F - 400 V
Supplementary Capacitor (Met. Prop.)	N/A
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 440 mm (6.1 x 11.3 x 17.3 in)
Net Weight	12.3 kg (27.12 lb)

Three-Phase Filter 579529 (8326-00)

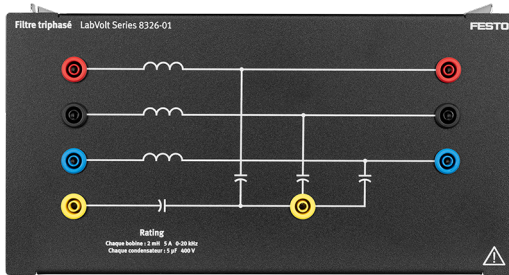


The Three-Phase Filters consists of three inductors and four capacitors enclosed in a half-size EMS module. Eight safety banana jacks on the module front panel provide access to the three-phase filter. The module is used to filter three-phase signals in power electronics applications.

Specifications

Parameter	Value
Inductors	
Number	3
Ratings	2 mH – 5 A – 0-20 kHz
Capacitors	
Number	4
Type	Metallized polypropylene
Ratings	5 μ F – 400 V
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 440 mm (6.1 x 11.3 x 17.3 in)
Net Weight	TBE

Capacitive Load 763366 (8331-00)

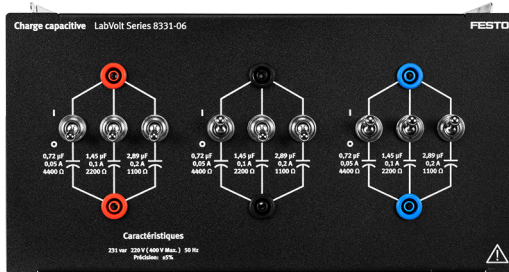

The Capacitive Load consists of a module housing nine capacitors arranged in three identical banks. Each bank consists of three capacitors connected in parallel that can be switched on or off with toggle switches to obtain various capacitance values. This allows the equivalent capacitance of each bank to be increased or decreased by steps. Six safety banana jacks on the module front panel provide access to each capacitor bank. The three capacitor banks can be connected separately for operation in three-phase circuits. Also, the three capacitor banks can be

connected together for operation in single-phase circuits.

A permanently connected discharge resistor reduces the voltage across the terminals of each bank of capacitors to 5% of the applied voltage within 25 seconds after the load is disconnected from the supply. The Capacitive Load may be used with both dc and ac power.

The Capacitive Load is commonly used in conjunction with the other basic load modules, the Resistive Load and the Inductive Load to experiment with the effects of different types of loads on a circuit.

Specifications

Parameter	Value
Capacitors	
Quantity	Three identical banks of three capacitors
Capacitance Values (Each Bank)	2.2/4.4/8.8 μ F
Reactance Values (Each Bank)	300/600/1200 Ω
Nominal Voltage	120 V – 60 Hz
Maximum Voltage	230 V

Parameter	Value
Capacitance Value Accuracy	$\pm 5\%$
Load at Nominal Voltage (Each Bank)	
Reactive Power	12-84 var
Current	0.1-0.7 A
Steps	Seven, of equal increment
Current Increment	0.1 A
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 410 mm (6.1 x 11.3 x 16.1 in)
Net Weight	5.7 kg (12.6 lb)

Three-Phase Transformer Bank 579559 (8348-40)



The Three-Phase Transformer Bank consists of three independent power transformers enclosed in a module. Safety banana jacks on the module front panel provide individual access to the windings of each power transformer, allowing connection in either wye or delta configuration. The transformer windings are polarized and the polarity of each winding is indicated by a small dot on the module front panel. Resettable fuses protect the primary and secondary windings of each transformer against overcurrent. Fuse status lamps on the module front panel turn on when the resettable fuses open.

Specifications

Parameter	Value
Rating (Each Transformer)	
Primary Voltage	208 V
Secondary Voltage	208/120 V
Power	250 VA
Full-Load Current	1.2 A
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 410 mm (6.1 x 11.3 x 16.1 in)
Net Weight	13.9 kg (30.6 lb)

Synchronizing Module / Three-Phase Contactor 8204391 (8621-B0)



The Synchronizing Module / Three-Phase Contactor is a half-size EMS module used to control various electric devices, or synchronize two ac power sources like a synchronous generator with an ac power network. The Synchronizing Module / Three-Phase Contactor consists of a three-phase contactor whose coil can be energized either manually with a toggle switch, or automatically with a thyristor fired by applying to the Remote Control input of the module, a low-level (TTL) signal from the Data Acquisition and Control Interface. Six safety banana jacks

(one pair per phase) allow connection of electric devices or ac power sources across the contacts of the three-phase contactor. Three indicator lamps indicate the relative level of the voltage across their corresponding contact terminals.

Specifications

Parameter	Value
Contactors	
Power Input	120 V – 50 mA – 60 Hz
Contacts	400 V – 3 A ac
Remote Control Input	
Voltage	0/2.5-24 V dc
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 440 mm (6.1 x 11.3 x 17.3 in)
Net Weight	3.6 kg (7.9 lb)
Shipping Weight	5.2 kg (11.4 lb)

Lead-Acid Battery Pack 579591 (8802-10)



The Lead-Acid Battery Pack is a half-size EMS module housing four 12 V lead-acid batteries connected in series. The Lead-Acid Battery Pack thus provides a fixed dc voltage of 48 V, available at two color-coded safety banana jacks on the module front panel.

Three battery voltage test points allow measurement of the voltage provided by each of the four 12 V batteries. A parallel charging input terminal permits the charging of several Lead Acid Battery Packs connected in parallel at the same time. The Lead-Acid Battery Pack is protected against overcurrent and

short-circuits. The Lead-Acid Battery Pack can be used as a 48 V dc power source, and in energy production and storage applications implemented with the Electricity and New Energy Training Equipment.

Specifications

Parameter	Value
Battery Pack	
Type	4 valve-regulated lead-acid batteries
Voltage	48 V (12 V for each battery)
Capacity	9 Ah
Maximum Charge Current	2.7 A
Maximum Discharge Current	7 A
Parallel Charging Input	58 V maximum
Overcurrent Protection	
Battery Pack Fuse	10 A
Test Point Limiting Resistors (3)	1 kΩ
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 440 mm (6.1 x 11.3 x 17.3 in)
Net Weight	13.8 kg (30.4 lb)

Three-Phase Power Supply 579612 (8823-00)




The Power Supply consists of a fixed-voltage three-phase ac power source and a fixed-voltage dc power source enclosed in a half-size EMS module. It can be used to power most of the EMS modules of the Electricity and New Energy Training Equipment. Color-coded safety banana jacks provide access to both power sources. Independent circuit breakers, with a reset button on the front panel of the module, protect the inputs and outputs from overcurrent conditions. Indicator lamps allow monitoring the presence of input voltage on each phase.

Specifications

Parameter	Value
Power Requirements	
Maximum Current	10 A
AC Power Network Installation	3 phases (120/208 V – 60 Hz), star (wye) configuration including neutral and ground wires, protected by a 20 A circuit breaker
AC Power Network Connector	NEMA L21-20
Outputs	
Fixed AC 3-Phase	120/208 V – 5 A
Fixed DC	120 V – 4 A
Included Power Cord	3 m (10 ft)
Physical Characteristics	
Dimensions (H x W x D)	212 x 287 x 496 mm (8.3 x 11.3 x 19.5 in)
Net Weight	5.7 kg (12.5 lb)

IGBT Chopper/Inverter 579623 (8837-B0)

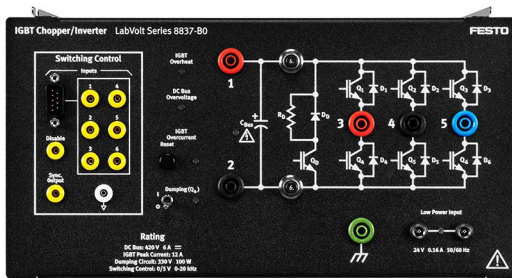

The IGBT Chopper/Inverter module consists of seven insulated-gate bipolar transistors (IGBT) mounted in a half-size EMS module. Six IGBTs are used to implement choppers and inverters. These IGBTs are protected against a variety of abnormal operating conditions, such as short-circuits, overvoltage, overcurrent, and overheat. The seventh IGBT and a dumping resistor allow smooth dissipation of excess energy at the dc bus. The dumping circuit can be activated through the use of a toggle switch on the front panel.

The module switching control section allows 0/5 V pulse signals from either the Data Acquisition and Control Interface, Model 9063, the Chopper/Inverter Control Unit, Model 9029, or any compatible 0/5 V control unit, to be applied to the gating circuits of the IGBTs. The signals are input in the IGBT Chopper/Inverter module through a nine-pin connector.

Six miniature banana jacks can be used as test points to monitor the pulse signals using an oscilloscope. These jacks can also be used to inject 0/5 V pulse signals from an alternate control unit, as well as to inhibit each gating circuit. The IGBT Chopper/Inverter module also includes a synchronization output to trigger an oscilloscope when observing the switching control signals, as well as a switching control disable input that allows all six IGBTs in the chopper/inverter section to be switched off.

Specifications

Parameter	Value
DC Bus	
Maximum Voltage	420 V
Maximum Current	6 A
Filtering Capacitor	1360 μ F
Protections	
DC Bus Overvoltage	440 V
DC Bus Circuit Breaker	6 A
IGBT Electronic Overcurrent	12 A
IGBT Overheat	About 60°C
Dumping Circuit	
Voltage Threshold	330 V
Resistor	100 Ω , 100 W
Switching Control Signals	
Level	0/5 V
High Level Current	about 600 μ A
Frequency Range	0-20 kHz
Minimum Dead Time	1.2 μ s
Power Requirements	24 V, 0.16 A, 50/60 Hz
Accessories	
Accessories	24 V power cable (1)
	2 mm banana plug test leads (2)
	DB9 connector control cable (1)
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 410 mm (6.1 x 11.3 x 16.1 in)
Net Weight	6.8 kg (15 lb)

Power Thyristors 763376 (8841-20)



The Power Thyristors module consists of six power thyristors (SCRs) mounted in a half-size EMS enclosure. Each individual thyristor is protected against overcurrents and short-circuits. All the anodes and cathodes of the thyristors are terminated on the front panel by color-coded, 4 mm safety banana jacks. To reduce the number of external connections, the most typical thyristor configurations can be achieved through the use of two toggle switches on the front panel.

A firing control section allows six 0-5 V pulse signals from either the Data Acquisition and Control Interface, Model 9063, the Thyristor Firing Unit, Model 9030, or any compatible 0-5 V control unit, to be applied to the gating circuits of the thyristors. The signals are input in the Power Thyristors module through a nine-pin connector.

Six miniature banana jacks in this section are used as test points to monitor the firing control signals using an oscilloscope. They can also be used to inject 0-5 V pulse signals from an alternate firing unit, as well as to inhibit each gating circuit. The Power Thyristors module also includes a synchronization output to trigger an oscilloscope when observing the firing control signals as well as a firing control disable input that prevents all six power thyristors from being fired.

Specifications

Parameter	Value
Rating	
Peak Inverse Voltage	600 V
Maximum Current	2 A

Parameter	Value
Gate Control Signals	0-5 V Pulses (TTL compatible)
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 440 mm (6.1 x 11.3 x 17.3 in)
Net Weight	5.6 kg (12.35 lb)

Rectifier and Filtering Capacitors 579630 (8842-A0)



This Rectifier and Filtering Capacitors module consists of a three-phase bridge rectifier and two separate capacitors enclosed in a half-size EMS module. The bridge allows the conversion of a three-phase voltage input into an unfiltered dc voltage. This dc voltage can then be filtered using the polarized capacitors (each one protected by a diode). Internal electrical components are identified on the module front panel by silkscreened symbols and terminated by 4 mm safety banana jacks.

Specifications

Parameter	Value
Electrical Characteristics	
Maximum Network Voltage	230 V - 3~ - 50/60 Hz
Maximum Diode Current	8 A
Each Capacitor	210 μ F - 450 V dc
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 440 mm (6.1 x 11.3 x 17.3 in)
Net Weight	2.9 kg (6.4 lb)

Timing Belt 579637 (8942-00)



The Timing Belt is a high-quality industrial synchro-cog timing belt made of rubber whose teeth exactly mesh with the geared pulley fitted on the shaft of all 0.2 kW EMS machines. The Timing Belt is supplied in a fixed length appropriate for coupling two adjacent EMS machines together without slippage between them.

Specifications

Parameter	Value
Physical Characteristics	
Pitch	9.5 mm (0.375 in)
Pitch Length	819 mm (32.25 in)
Number of Teeth	86
Dimensions (Width)	12.7 mm (0.5 in)
Net Weight	0.1 kg (0.2 lb)

Connection Lead Set 579638 (8951-L0)

This Connection Lead Set consists of extra-flexible leads terminated with stacking 4 mm safety banana plugs. In addition, the set includes stacking 2 mm banana plug leads of the same length and color.

4mm: 20 x 30 cm yellow, 10 x 60 cm red, 4 x 90 cm blue. 2mm: 4 x 60 cm red.

Specifications

Parameter	Value
4 mm Safety Banana Plug Leads Characteristics	
Cross Section	1 mm ² (1974 cmil)
Rated Current	19 A
Rated Voltage	600 V, CAT II
4 mm Safety Banana Plug Leads Quantities	
Yellow, 30 cm (12 in)	20
Red, 60 cm (24 in)	10
Blue, 90 cm (36 in)	4
2 mm Safety Banana Plug Leads Characteristics	
Cross Section	0.5 mm ² (987 cmils)
Rated Current	10 A
Rated Voltage	30 V ac / 60 V dc
2 mm Safety Banana Plug Leads Quantities	
Red, 60 cm (24 in)	4

Four-Quadrant Dynamometer/Power Supply 579662 (8960-E0)



The Four-Quadrant Dynamometer/Power Supply is a highly versatile USB peripheral designed to be used in the Electric Power Technology Training Systems. Two operating modes are available: Dynamometer and Power Supply. A wide variety of user-selectable functions is available in each operating mode.

In the Dynamometer mode, the unit becomes a four-quadrant dynamometer that can act as either a fully configurable brake (i.e., a mechanical load) or a fully configurable prime mover (i.e., a motor drive). In the Power Supply mode, the unit becomes a four-quadrant power supply that can act as a dc voltage source, dc current source, ac power source, etc.

In each operating mode, key parameters related to the selected function are displayed. Speed, torque, mechanical power, and energy are displayed in the Dynamometer mode while voltage, current, electrical power, and energy are displayed in the Power Supply mode. Optional functions, such as a small wind-turbine emulator, a hydraulic turbine emulator, a solar panel emulator, battery chargers, an SDK (Software Development Kit) etc., can be added to the standard functions to further enhance the training possibilities of the Four-Quadrant Dynamometer/Power Supply.

Two modes are available to control the function which the Four-Quadrant Dynamometer/Power Supply performs: Manual and Computer-Based.

In the Manual control mode, the module operates as a stand-alone unit, and the function performed is selected, set, and monitored using front-panel mounted controls and display. This mode provides access to all basic functions. In the Computer-Based control mode, the function performed by the module is selected, set, and monitored using the LVDAC-EMS software. In this mode, communication between the Four-Quadrant Dynamometer/Power Supply and the host computer running the LVDAC-EMS software is achieved through a USB connection. This mode provides access to all basic functions, as well as to additional advanced functions.

Includes the Four-Quadrant Dynamometer/Power Supply with the following function sets activated:

- Standard Functions (Manual Control)
- Standard Functions (Computer-Based Control)

- Lead-Acid Battery Charger

The Four-Quadrant Dynamometer/Power Supply is powered from a standard wall receptacle via a line cord that connects to the module's front panel. The module helps energy conservation by returning the mechanical or electrical energy it receives to the ac power network while maintaining a unity power factor.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ³⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ³⁸

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ³⁹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴⁰

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴¹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴²

³⁷ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

³⁸ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

³⁹ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴⁰ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴¹ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴² Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴⁴

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴⁵

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴⁶

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴⁸

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁴⁹

⁴³ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴⁴ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴⁵ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴⁶ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴⁷ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴⁸ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁴⁹ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵⁰

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵¹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵²

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵⁴

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵⁵

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵⁶

⁵⁰ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁵¹ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁵² Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁵³ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁵⁴ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁵⁵ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁵⁶ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵⁸

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁵⁹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁶⁰

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁶¹

Specifications

Parameter	Value
Dynamometer Mode	
Magnetic Torque	0 to 3 N·m (0 to 27 lbf·in)
Direction of Rotation	CW / CCW
Speed	0 to 2500 r/min
Nominal Power	350 W
Power Supply Mode	
DC Voltage	0 to ± 150 V
AC Voltage (RMS)	0 to 105 V (no-load)
DC Current	0 to ± 5 A
AC Current (RMS)	0 to 3.5 A
Maximum Output Power	500 W
AC Frequency	10 to 120 Hz
Control Functions	
Activated Sets	Standard Functions (Manual Control), Model 8968-1
	Standard Functions (Computer-Based Control), Model 8968-2
	Lead-Acid Battery Charger, Model 8968-4

⁵⁷ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁵⁸ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁵⁹ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁶⁰ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

⁶¹ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Note that only one computer is required per station.

Parameter	Value
Liquid-Crystal Display (LCD)	76 mm (3 in), monochrome, background-illuminated, 240 x 160 dots
Control Inputs	
Command Input	0 to ± 10 V
Thermistor Input	10 k Ω , type 1
Control Outputs	
Shaft Encoder	Quadrature encoder (A-B) - 360 pulses/revolution - TTL compatible
Torque Output Sensitivity	0.3 N·m/V (2.655 lbf-in/V)
Speed Output Sensitivity	500 r/min/V
Communication Port	USB 2.0
Power Requirements	120 V - 6 A - 60 Hz, must include live, neutral, and ground wires
Computer Requirements	A currently available personal computer with USB 2.0 ports, running under one of the following operating systems: Windows® 7 or Windows® 8.
Physical Characteristics	
Dimensions (H x W x D)	308 x 287 x 490 mm (12.1 x 11.3 x 19.3 in)
Net Weight	19.5 kg (43.0 lb)

Standard Functions (manual control) Set 581436 (8968-10)

The Standard Functions (manual control) Set is a package of control functions that can be activated in the Four-Quadrant Dynamometer/Power Supply, enabling the module to perform a wide variety of functions in each of its two operating modes (Dynamometer and Power Supply).

The set allows only manual control of the functions. This means that the Four-Quadrant Dynamometer/Power Supply operates as a stand-alone unit, and the function performed is selected, set, and monitored using front-panel mounted controls and display. The following control functions are available in the set:

Dynamometer operating mode

- Two-Quadrant, Constant-Torque Brake
- Clockwise Prime Mover/Brake
- Counterclockwise Prime Mover/Brake
- Clockwise Constant-Speed Prime Mover/Brake
- Counterclockwise Constant-Speed Prime Mover/Brake
- Positive Constant-Torque Prime Mover/Brake
- Negative Constant-Torque Prime Mover/Brake


Power Supply operating mode

- Positive Voltage Source
- Negative Voltage Source
- 200 V DC Bus
- Positive Current Source
- Negative Current Source
- 50 Hz Power Source
- 60 Hz Power Source
- Lead-Acid Battery Float Charger

Specifications

Parameter	Value
Control Functions	
Control Functions	Two-Quadrant, Constant-Torque Brake
	Clockwise Prime Mover/Brake
	Counterclockwise Prime Mover/Brake
	Clockwise Constant-Speed Prime Mover/Brake
	Counterclockwise Constant-Speed Prime Mover/Brake
	Positive Constant-Torque Prime Mover/Brake
	Negative Constant-Torque Prime Mover/Brake
	Positive Voltage Source
	Negative Voltage Source
	Positive Current Source
	Negative Current Source
	50 Hz Power Source
	60 Hz Power Source
	200 V DC Bus
	Lead-Acid Battery Float Charger
Two-Quadrant, Constant-Torque Brake	
Torque	0-3 N·m (26.55 lbf·in)
Clockwise/Counterclockwise Prime Mover/Brake	
Speed	0-2500 r/min
Clockwise/Counterclockwise Constant-Speed Prime Mover/Brake	
Speed	0-2500 r/min
Positive/Negative Constant-Torque Prime Mover/Brake	
Torque	0-3 N·m (26.55 lbf·in)
Positive/Negative Voltage Source	
Voltage	0 to ± 150 V
Positive/Negative Current Source	
Current	0 to ± 5 A
50 Hz/60 Hz Power Source	
No-Load Voltage	0-140 V
200 V DC Bus	
Status	On or off
Lead-Acid Battery Float Charger	
Float Voltage	0-150 V

Standard Functions (computer-based control) Set 581437 (8968-20)

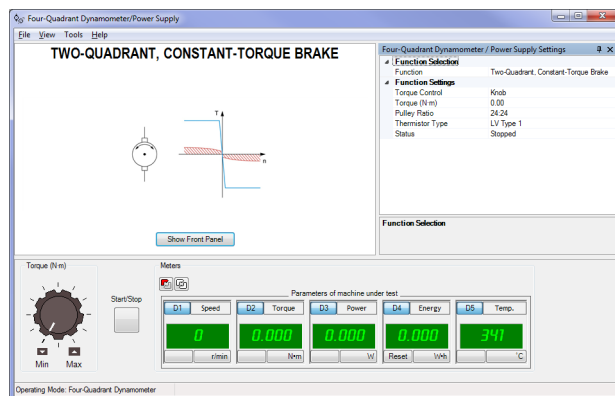

The Standard Functions (computer-based control) Set is a package of control functions that can be activated in the Four-Quadrant Dynamometer/Power Supply, enabling the module to perform a wide variety of functions in each of its two operating modes (Dynamometer and Power Supply).

The set allows only computer-based control of the functions. This means that the function performed by the Four-Quadrant Dynamometer/Power Supply is selected, set, and monitored using the LVDAC-EMS software. The following control functions are available in the set:

Dynamometer operating mode

- Two-Quadrant, Constant-Torque Brake
- Clockwise Prime Mover/Brake
- Counterclockwise Prime Mover/Brake
- Clockwise Constant-Speed Prime Mover/Brake
- Counterclockwise Constant-Speed Prime Mover/Brake
- Positive Constant-Torque Prime Mover/Brake
- Negative Constant-Torque Prime Mover/Brake
- Four-Quadrant Constant-Speed Prime Mover/Brake
- Speed Sweep

Power Supply operating mode


- Positive Voltage Source
- Negative Voltage Source
- DC Voltage Source
- Positive Current Source
- Negative Current Source
- DC Current Source
- 50 Hz Power Source
- 60 Hz Power Source
- AC Power Source
- Lead-Acid Battery Float Charger

Specifications

Parameter	Value
Control Functions	
Control Functions	Two-Quadrant, Constant-Torque Brake
	Clockwise Prime Mover/Brake
	Counterclockwise Prime Mover/Brake
	Clockwise Constant-Speed Prime Mover/Brake
	Counterclockwise Constant-Speed Prime Mover/Brake
	Positive Constant-Torque Prime Mover/Brake
	Negative Constant-Torque Prime Mover/Brake
	Four-Quadrant, Constant-Speed Prime Mover/Brake
	Speed Sweep
	Mechanical Load
	Positive Voltage Source
	Negative Voltage Source
	DC Voltage Source
	Positive Current Source
	Negative Current Source
	DC Current Source
	50 Hz Power Source
	60 Hz Power Source
	AC Power Source
	Lead-Acid Battery Float Charger
Two-Quadrant, Constant-Torque Brake	
Torque Control	Software knob, 8960 module knob, or 8960 command input

Parameter	Value
Torque	0-3 N·m (26.55 lbf·in)
Pulley Ratio	24:24, 24:12, or 24:32
Clockwise/Counterclockwise Prime Mover/Brake	
Speed Control	Software knob, 8960 module knob, or 8960 command input
Speed	0-2500 r/min
Pulley Ratio	24:24, 24:12, or 24:32
Clockwise/Counterclockwise Constant-Speed Prime Mover/Brake	
Speed Control	Software knob, 8960 module knob, or 8960 command input
Speed	0-2500 r/min
Pulley Ratio	24:24, 24:12, or 24:32
Positive/Negative Constant-Torque Prime Mover/Brake	
Torque Control	Software knob, 8960 module knob, or 8960 command input
Torque	0-3 N·m (26.55 lbf·in)
Pulley Ratio	24:24, 24:12, or 24:32
Four-Quadrant, Constant-Speed Prime Mover/Brake	
Speed Control	Software knob, 8960 module knob, or 8960 command input
Speed	0-2500 r/min
Pulley Ratio	24:24, 24:12, or 24:32
Speed Sweep	
Start Speed	-3000 r/min to 3000 r/min
Finish Speed	-3000 r/min to 3000 r/min
Number of Steps	0-50 steps
Step Duration	2-10 s
Record Data to Table	Yes or no
Pulley Ratio	24:24, 24:12, or 24:32
Mechanical Load	
Load Type	Flywheel, fan, grinder, conveyor, calender, crane, user defined
Inertia	0.005-1 kg·m ² (0.119-23.73 lb·ft ²)
Friction Torque	0.05-3 N·m (0.44-26.55 lbf·in)
Pulley Ratio	24:24, 24:12, or 24:32
Positive/Negative Voltage Source	
Voltage Control	Software knob, 8960 module knob, or 8960 command input
Voltage	0 V to 147 V / -147 V to 0 V
DC Voltage Source	
Voltage Control	Software knob, 8960 module knob, or 8960 command input
Voltage	-147 V to 147 V
Positive/Negative Current Source	
Current Control	Software knob, 8960 module knob, or 8960 command input
Current	0 A to 5 A / -5 A to 0 A
DC Current Source	
Current Control	Software knob, 8960 module knob, or 8960 command input
Current	-5 A to 5 A
50 Hz/60 Hz Power Source	
Voltage Control	Software knob, 8960 module knob, or 8960 command input
No-Load Voltage	0-140 V
AC Power Source	
No-Load Voltage	0-140 V
DC Offset Correction	-1000 to 1000
Frequency	10-100 Hz
Lead-Acid Battery Float Charger	
Float Voltage	0-150 V

Lead-Acid Battery Charger Function Set 581438 (8968-40)

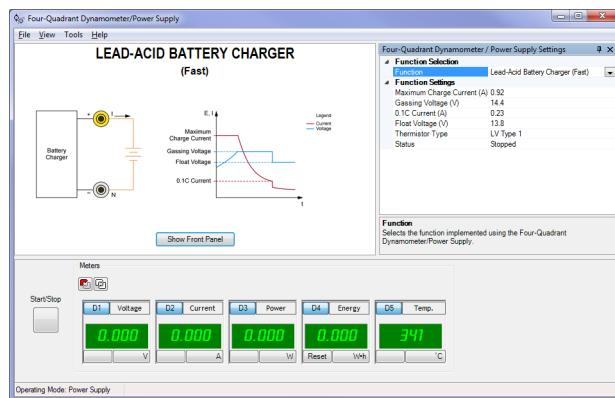

The Lead-Acid Battery Charger Function Set is a package of control functions that can be activated in the Four-Quadrant Dynamometer/Power Supply, enabling the module to implement a lead-acid battery charger, as well as a battery discharger.

The Lead-Acid Battery Charger control function is only available in computer-based mode. This means that the function performed by the Four-Quadrant Dynamometer/Power Supply is selected, set, and monitored using the LVDAC-EMS software. The following control functions are available in the set:

Power Supply operating mode

- Lead-Acid Battery Charger (Fast):

This function uses the four-quadrant power supply to implement a battery charger that is able to rapidly charge lead-acid batteries of various capacities (typically in less than two hours). A three-step charge algorithm is used. Battery charging starts with a constant current corresponding to the battery maximum charge current until the battery gassing voltage is reached. At this point, battery charging continues with a constant voltage (close to gassing voltage) until the charge current decreases to 0.1 C. Then, constant-voltage charging continues but at a lower voltage (float charging voltage). The user has to specify the following four battery characteristics for the charger to achieve proper charge control: maximum charge current, gassing voltage, 0.1C current (10% of battery capacity), and float charging voltage. The function indicates the voltage, current, electrical power, and energy at the charger output. The function can also indicate battery temperature when the temperature sensor of the battery (if so equipped) is connected to the Thermistor Input of the Four-Quadrant Dynamometer/Power Supply. The function can also indicate battery temperature when the temperature sensor of the battery (if so equipped) is connected to the Thermistor Input of the Four-Quadrant Dynamometer/Power Supply. The license for the Lead-Acid Battery Charger, is required to activate the Lead-Acid Battery Charger (Fast) function in the Four-Quadrant Dynamometer/Power Supply.

- Battery Discharger (Constant-Current Timed Discharge with Voltage Cutoff):


This function uses the four-quadrant power supply to sink a constant current from a battery, thereby discharging the battery at a specific rate, during a specific period. The discharger also monitors the battery voltage during discharge. Battery discharging terminates immediately when the battery voltage decreases to a specific cutoff voltage. The user has to specify the discharge current, discharge duration, and cutoff voltage for the discharger to achieve proper discharge control. The function indicates the voltage, current, electrical power, and energy at the discharger output. The function can also indicate battery temperature when the temperature sensor of the battery (if so equipped) is connected to the Thermistor Input of the Four-Quadrant Dynamometer/Power Supply. The Battery Discharger function is perfectly suited to measure discharge characteristics of batteries at various rates as well as to bring a battery to a specific depth of discharge before a battery charging experiment. The license for the Lead-Acid Battery Charger, or the license for the Ni-MH Battery Chargers, is required to activate the Battery Discharger (Constant-Current Timed Discharge with Voltage Cutoff) function in the Four-Quadrant Dynamometer/Power Supply.

Specifications

Parameter	Value
Control Functions	

Parameter	Value
Control Functions	Lead-Acid Battery Charger (Fast)
	Battery Discharger (Constant-Current Timed Discharge with Voltage Cutoff)
Lead-Acid Battery Charger (Fast)	
Maximum Charge Current	0-5 A
Gassing Voltage	0-150 V
0.1C Current	0-5 A
Float Voltage	0-150 V
Battery Configuration	48V 3.4Ah (13S1P) or 10.2Ah (13S3P) auto detected
Battery Discharger (Constant-Current Timed Discharge with Voltage Cutoff)	
Discharge Current	0-5 A
Discharge Duration	0-2000 min
Cutoff Voltage	0-150 V

Data Acquisition and Control Interface
579686 (9063-D0)

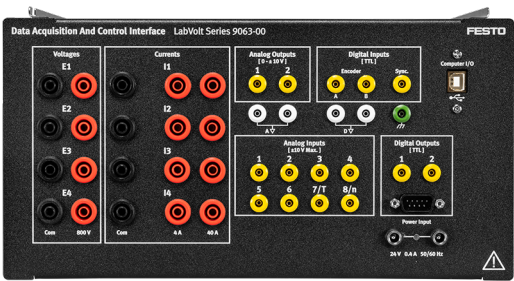

The Data Acquisition and Control Interface (DACI) is a versatile USB peripheral used for measuring, observing, analyzing, and controlling electrical and mechanical parameters in electric power systems and power electronics circuits. For these purposes, a set of computer-based instruments as well as a variety of control functions are available for the DACI. These instruments and control functions are accessed through the LVDAC-EMS software. The LVDAC-EMS software, as well as all available upgrades, is free and can be downloaded anytime on

the Festo Didactic website.

Together, the DACI and the LVDAC-EMS software allow training in various areas such as electric power technology, ac/dc machines, renewable energy, transmission lines, and power electronics using modern and versatile measuring instruments and control functions. LVDAC-EMS also offers the possibility to use pre-built SCADA interfaces for several applications to ease the view and understanding of the process taking place. The user guide provided allows students to quickly become familiar with the instruments and control functions available.

Model 9063-D includes the DACI, Model 9063, with the following function sets activated:

- Computer-Based Instrumentation Function, Model 9069-1
- Chopper/Inverter Control Function Set, Model 9069-2
- Thyristor Control Function Set, Model 9069-3

Manual

Description	Manual number
Computer-Based Instruments for EMS (User Guide)	585219 (86718-E0)

Table of Contents of the Manual(s)

Computer-Based Instruments for EMS (User Guide) (585219 (86718-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer

- 5 Measuring Three-Phase Power Using the Metering Window

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁶²
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁶³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁶⁴
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁶⁵

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁶⁶
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁶⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁶⁸
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁶⁹

⁶² Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁶³ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁶⁴ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁶⁵ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁶⁶ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁶⁷ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁶⁸ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁶⁹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁷⁰
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁷¹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁷²
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁷³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁷⁴
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁷⁵

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁷⁶
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁷⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁷⁸

⁷⁰ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁷¹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁷² Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁷³ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁷⁴ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁷⁵ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁷⁶ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁷⁷ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁷⁸ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

Qty	Description	Model number
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁷⁹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁸⁰
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁸¹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁸²
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁸³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁸⁴
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁸⁵

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁸⁶
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁸⁷

⁷⁹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸⁰ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸¹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸² Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸³ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸⁴ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸⁵ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸⁶ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸⁷ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁸⁸
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁸⁹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁹⁰
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁹¹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁹²
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁹³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁹⁴
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁹⁵

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁹⁶

⁸⁸ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁸⁹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹⁰ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹¹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹² Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹³ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹⁴ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹⁵ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹⁶ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

Qty	Description	Model number
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁹⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ⁹⁸
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ⁹⁹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ¹⁰⁰
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ¹⁰¹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ¹⁰²
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ¹⁰³

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ¹⁰⁴
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ¹⁰⁵

⁹⁷ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹⁸ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

⁹⁹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹⁰⁰ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹⁰¹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹⁰² Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹⁰³ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹⁰⁴ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹⁰⁵ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ¹⁰⁶
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ¹⁰⁷

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ¹⁰⁸
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ¹⁰⁹

Additional Equipment Required to Perform the Exercises (Purchased separately)

Qty	Description	Model number
1	Personal Computer _____	579785 (8990-00) ¹¹⁰
1	AC 24 V Wall Mount Power Supply _____	579696 (30004-20) ¹¹¹

Specifications

Parameter	Value
Insulated Voltage Inputs (4)	
Range (Low / High Scales)	-80 to +80 V / -800 to + 800 V (user-selectable through software)
Impedance (Low / High Scales)	326.6 k Ω / 3.25 M Ω
Bandwidth	DC to 65 kHz (-3 dB)
Accuracy	1% (dc to 10 kHz)
Insulation	800 V
Measurement Category	CAT II (283 V ac/400 V dc versus ground)
Insulated Current Inputs (4)	
Range (Low / High Scales)	-4 to +4 A / -40 to + 40 A (25 A rms)
Impedance (Low / High Scales)	5 m Ω / 50 m Ω
Bandwidth	DC to 65 kHz (-3 dB)
Accuracy	1% (dc to 10 kHz)
Insulation	800 V
Measurement Category	CAT II (283 V ac/400 V dc versus ground)
Analog Inputs (8)	
Voltage Range	-10 to +10 V
Impedance	> 10 M Ω
Bandwidth	DC to 125 kHz
Measured Parameters	User-selectable through software

¹⁰⁶ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹⁰⁷ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹⁰⁸ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.


¹⁰⁹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹¹⁰ Refer to the Computer Requirements in the System Specifications section of this datasheet if the computer is to be provided by the end-user. Only one computer is required per station. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

¹¹¹ Required if power is not supplied by the Power Supply, Model 8821-2. This model is available in multiple voltage- and frequency dependent variants. Contact a Festo representative to obtain the correct part number.

Parameter	Value
Parameter-to-Voltage Ratio	User-determined through software
A/D Converter for Insulated and Analog Inputs (16)	
Type	Successive approximation
Resolution	12 bits
Integral Non-Linearity	$\leq \pm 1.5$ LSB
Differential Non-Linearity	$\leq \pm 1$ LSB
Maximum Sampling Rate	600 ksamples/s (one channel)
FIFO Buffer Size	16 ksamples
Analog Outputs (2)	
Voltage Range (2)	-10 to +10 V
Operational Load Impedance	$> 600 \Omega$
D/A Converter for Analog Outputs (2)	
Type	Resistor string
Resolution	12 bits
Integral Non-Linearity	$\leq \pm 8$ LSB
Differential Non-Linearity	-0.5 to +0.7 LSB
Digital Inputs (3)	
Types	Encoder (2), synchronization (1)
Signal Level	0-5 V (TTL compatible)
Maximum Input Frequency	50 kHz
Impedance	5 k Ω
Digital Outputs (9)	
Types	Control (6 on a DB9 connector and 2 on 2 mm banana jacks), synchronization (1 on a DB9 connector)
Signal Level	0-5 V (TTL compatible)
Maximum Output Frequency	20 kHz (software-limited)
Impedance	200 Ω
Control Functions	
Activated Sets	Computer-Based Instrumentation Function, Model 9069-1
	Chopper/Inverter Control Function Set, Model 9069-2
	Thyristor Control Function Set, Model 9069-3
Computer I/O Interface	USB 2.0 full speed via type-B receptacle
Power Requirements	24 V - 0.4 A - 50/60 Hz
Accessories	
Included Accessories	2 m USB interconnection cable (1)
	24 V power cable (1)
	2 mm banana plug test leads (3)
	DB9 connector control cable (1)
Physical Characteristics	
Dimensions (H x W x D)	154 x 287 x 410 mm (6.1 x 11.3 x 16.1 in)
Net Weight	3.9 kg (8.6 lb)

Acquisition functions 581452 (9069-10)

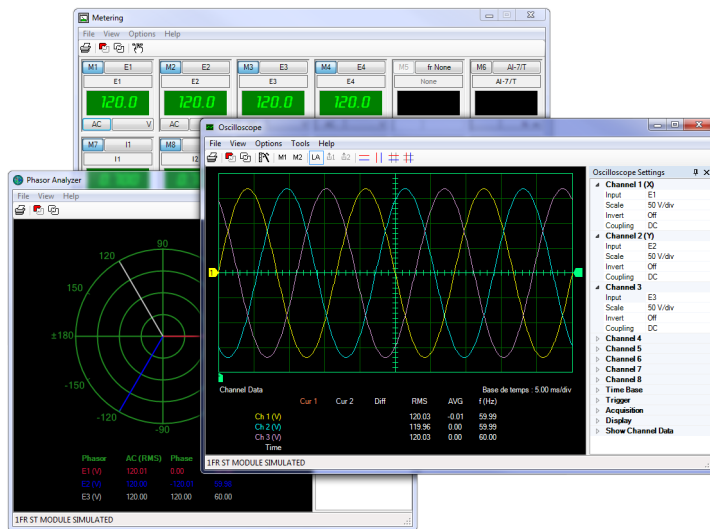


The Computer-Based Instrumentation Function Set, includes the following computer-based instruments:

- Metering
- Data Table and Graph
- Oscilloscope
- Phasor Analyzer
- Harmonic Analyzer

Specifications

Parameter	Value
Metering	
Number of Meters	18
Sampling Window	266.7 ms or user adjusted through software (11.4-819 ms)
Sampling Frequency (each meter)	7.68 kHz or user adjusted through software (2.5-179.2 kHz)
Display Type	Digital or analog, user selectable through software
Oscilloscope	
Number of Channels	8
Vertical Sensitivity	2-500 V/div.
Time Base	0.0001-10 s/div.
Sampling Window	20 x selected time base (software triggering) / 10 x selected time base (hardware triggering)
Sampling Frequency	512 samples per measured parameter per horizontal sweep, up to a maximum of 512 kHz
Phasor Analyzer	
Voltage Sensitivity	2-200 V/div.
Current Sensitivity	0.1-5 A/div.
Sampling Window	2-409 ms
Sampling Frequency (Each Phasor)	5-102.4 kHz
Harmonic Analyzer	
Fundamental-Frequency Range	1-1400 Hz
Number of Harmonic Components	5 to 40, user selectable through software
Vertical Scale (Relative Scale)	0.1-10%/div.
Vertical Scale (Absolute Scale)	0.1-50 V/div., 0.01-10 A/div.
Sampling Window	10 ms to 1 s
Sampling Frequency	16-102 kHz

Chopper/Inverter Control Function Set 581453 (9069-20)

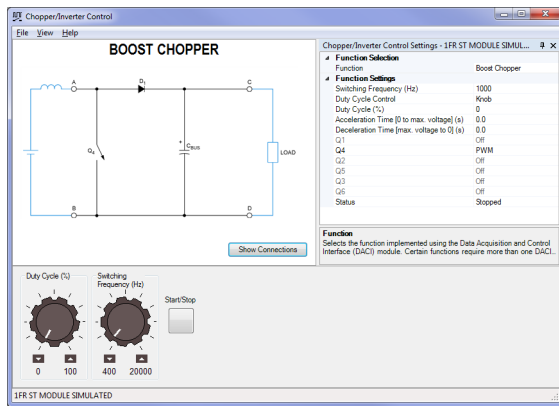

The Chopper/Inverter Control Function Set enables the following choppers and inverters to be implemented using the Data Acquisition and Control Interface, the IGBT Chopper/Inverter and the Insulated DC-to-DC Converter:

- Buck Chopper (high-side switching)
- Buck Chopper (low-side switching)
- Buck/Boost Chopper
- Boost Chopper
- Four-Quadrant Chopper


- Buck Chopper with Feedback
- Boost Chopper with Feedback
- Single-Phase, 180° Modulation Inverter
- Single-Phase PWM Inverter
- Three-Phase, 180° Modulation Inverter
- Three-Phase PWM Inverter
- Three-Phase Inverter (constant V/f ratio)
- Insulated DC-to-DC Converter
- Four-Quadrant DC Motor Drive without Current Control
- Four-Quadrant DC Motor Drive

Specifications

Parameter	Value
Control Functions	
Control Functions	Buck Chopper (high-side switching)
	Buck Chopper (low-side switching)
	Buck/Boost Chopper
	Boost Chopper
	Four-Quadrant Chopper
	Buck Chopper with Feedback
	Boost Chopper with Feedback
	Single-Phase, 180° Modulation Inverter
	Single-Phase PWM Inverter
	Three-Phase, 180° Modulation Inverter
	Three-Phase PWM Inverter
	Three-Phase PWM Inverter (constant V/f ratio)
	Insulated DC-to-DC Converter
	Four-Quadrant DC Motor Drive without Current Control
	Four-Quadrant DC Motor Drive
Buck Chopper (high-side switching), Buck Chopper (low-side switching), Buck/Boost Chopper, Boost Chopper, Four-Quadrant Chopper	
Switching Frequency	400 Hz to 20 kHz
Duty Cycle Control	Knob or analog input on the DACI

Parameter	Value
Duty Cycle	0-100%
Acceleration Time (0 to Max. Voltage)	0-100 s
Deceleration Time (Max. Voltage to 0)	0-100 s
IGBTs Q1 to Q6	PWM, on, off (certain IGBTs are unavailable depending on the selected chopper control function)
Buck Chopper with Feedback, Boost Chopper with Feedback	
Switching Frequency	2-20 kHz
Command Input	Knob or analog input on the DACI
Command	0-100%
Feedback Input	Voltage, current, speed, power, or low-power analog signal
Feedback Filter Cutoff Frequency	100-4900 Hz
Feedback Range (100% Value =)	10-400 V
Acceleration Time (0 to 100%)	0-100 s
Deceleration Time (100% to 0)	0-100 s
Single-Phase, 180° Modulation Inverter	
DC Bus	Unipolar or bipolar
Frequency	0-120 Hz
IGBTs Q1 to Q6	180° Modulation, on, or off (certain IGBTs are unavailable)
Single-Phase PWM Inverter	
DC Bus	Unipolar or bipolar
Switching Frequency	400 Hz to 20 kHz
Frequency	0-120 Hz
Peak Voltage	0-100% of dc bus
IGBTs Q1 to Q6	PWM, on, or off (certain IGBTs are unavailable)
Three-Phase, 180° Modulation Inverter	
Phase Sequence	Forward (1-2-3), reverse (1-3-2), or forward/reverse
Frequency	0-120 Hz
IGBTs Q1 to Q6	180° Modulation, on, or off
Three-Phase PWM Inverter	
Switching Frequency	400 Hz to 20 kHz
Phase Sequence	Forward (1-2-3), reverse (1-3-2), or forward/reverse
Frequency	0-120 Hz
Peak Voltage	0-117% of dc bus/2
Modulation Type	Sinusoidal pulse-width modulation or space vector
IGBTs Q1 to Q6	PWM, on, or off
Three-Phase PWM Inverter (Constant V/f Ratio)	
Switching Frequency	400 Hz to 20 kHz
Phase Sequence	Forward (1-2-3), reverse (1-3-2), or forward/reverse
Frequency	0-120°
Knee Peak Voltage	0-117% of dc bus voltage/2
Knee Frequency	1-120 Hz
Modulation Type	Sinusoidal pulse-width modulation or space vector
Acceleration Time (0 to Knee)	0-100 s
Deceleration Time (Knee to 0)	0-100 s
Insulated DC-to-DC Converter	
Duty Cycle	0-45%
Four-Quadrant DC Motor Drive with and without Current Control	
Switching Frequency	2-20 kHz
Speed Command Input	Knob or analog input on the DACI
Speed Command	-5000 r/min to 5000 r/min
Pulley Ratio	24:12 or 24:24
Acceleration Time (0 to Max. Speed)	0-100 s
Deceleration Time (Max. Speed to 0)	0-100 s
Current Feedback Range	4 A or 40 A (only available in current control)
Current Feedback Filter Cutoff Frequency	100-4900 Hz (only available in current control)
Current Command Limit	0-40 A (only available in current control)

Thyristor Control Function Set 581454 (9069-30)

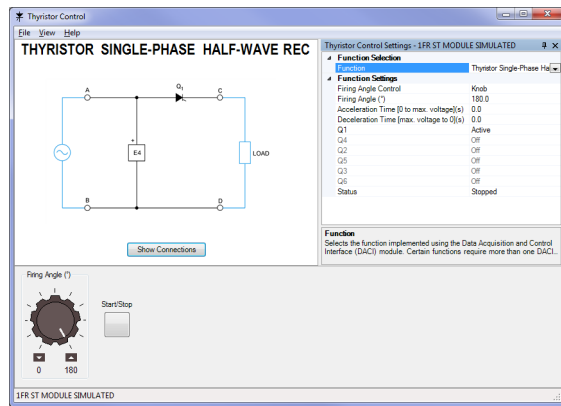

The Thyristor Control Function Set enables the following thyristor-based devices to be implemented using the Data Acquisition and Control Interface, and the Power Thyristors:

- Thyristor Single-Phase Half-Wave Rectifier
- Thyristor Single-Phase Bridge
- Thyristor Three-Phase Bridge
- Thyristor Three-Phase Bridge with Feedback
- Solid-State Relay
- Thyristor Single-Phase AC Power Control

- Thyristor Three-Phase AC Power Control
- Direct-On-Line Starter
- Soft Starter

Specifications

Parameter	Value
Control Functions	
Control Functions	Thyristor Single-Phase Half-Wave Rectifier
	Thyristor Single-Phase Bridge
	Thyristor Three-Phase Bridge
	Thyristor Three-Phase Bridge with Feedback
	Solid-State Relay
	Thyristor Single-Phase AC Power Control
	Thyristor Three-Phase AC Power Control
	Direct-On-Line Starter
	Soft Starter
Thyristor Single-Phase Half-Wave Rectifier, Thyristor Single-Phase Bridge, Thyristor Three-Phase Bridge	
Firing Angle Control	Knob or analog input on the DACI
Firing Angle	0-180°
Acceleration Time (0 to Max. Voltage)	0-100 s
Deceleration Time (Max. Voltage to 0)	0-100 s
Thyristors Q1 to Q6	Active, on, or off (certain thyristors are unavailable depending on the selected thyristor control function)
Thyristor Three-Phase Bridge with Feedback	
Command Input	On or off
Command	Knob or analog input on the DACI
Inverter Limit	100-180°
Arc-Cosine	On or off
Feedback Input	Voltage, rms voltage, current, speed, power, or low-power analog signal
Feedback Range (Voltage Input Only)	80-800 V
Current Feedback Range (Current Input Only)	0.4-4 A
Speed Feedback Range (Speed Input Only)	250-2500 r/min
Analog Feedback Range (Analog Input Only)	1-10 V
Power Feedback Range (Power Input Only)	32-3200 W
Feedback Filter Cutoff Frequency	10-180 Hz
Acceleration Time (0 to 100%)	0-100 s
Deceleration Time (100% to 0)	0-100 s
Thyristors Q1 to Q6	Active, on, or off

Parameter	Value
Solid-State Relay	
Zero-Voltage Switching	On or off
Relay Control	Open or close
Thyristors Q1 to Q6	Active, on, or off (certain thyristors are unavailable)
Thyristor Single-Phase AC Power Control	
Control Mode	Phase control, synchronous burst fire control, or asynchronous burst fire control
Firing Angle Control	Knob or analog input on the DACI
Firing Angle	0-180°
Thyristors Q1 to Q6	Active, on, or off (certain thyristors are unavailable)
Thyristor Three-Phase AC Power Control	
Load Configuration	3 wires star (3S), 3 wires delta (3D), 4 wires star (4S), or 6 wires delta (6D)
Control Mode	Phase control or synchronous burst fire control (certain control modes are unavailable depending on the selected thyristor control function)
Firing Angle Control	Knob or analog input on the DACI
Acceleration Time (0 to Max. Voltage)	0-100 s
Deceleration Time (Max. Voltage to 0)	0-100 s
Thyristors Q1 to Q6	Active, on, or off
Direct-On-Line Starter	
Motor Full-Load Current	0.4-2 A
Overload	On or off
Overload Class	5, 10, 15, 20, 25, 30, 35, or 40
Soft Starter	
Mode	Soft Start or current-limit start
Motor Full-Load Current	0.4-2 A
Initial Torque	15%, 25%, 35%, or 65% of LRT
Start Time	2-200 s
Kick-Start Time	0 s, 0.5 s, 1 s, or 1.5 s
Soft Stop	0, 1, 2, or 3 times the start time
Overload	On or off
Overload Class	5, 10, 15, 20, 25, 30, 35, or 40

AC 24 V Wall Mount Power Supply 579696 (30004-20)



This 24 V AC Power Supply is used specifically to power specific components from our learning systems, such as the Data Acquisition and Control Interface and the protection mechanism of our electrical machines.

Specifications

Parameter	Value
Power Requirements	
Maximum Current	0.75 A
AC Power Network Installation	120 V – 50/60 Hz, must include live, neutral, and ground wires
Power Outputs	
Fixed, Single-Phase AC	24 V – 2,5 A

Optional Equipment Description

Digital Multimeter (Optional)
579782 (8946-20)




The Digital Multimeter consists of an Extech EX350 Digital Multimeter. It is ideal to perform voltage, current, and resistance measurements in exercises.

Specifications

Parameter	Value
Voltage	
Ranges	0-600 V ac/dc
Current	
Range	0-10 A ac/dc
Resistance	
Range	0-40 MΩ
Physical Characteristics	
Dimensions (H x W x D)	182 x 90 x 45 mm (7.17 x 3.54 x 1.77 in)
Net Weight	354 g (0.78 lb)

Electromechanical Systems Simulation Software (LVSIM®-EMS) - 1 User Online, 1 year (Optional)
586971 (8972-00)

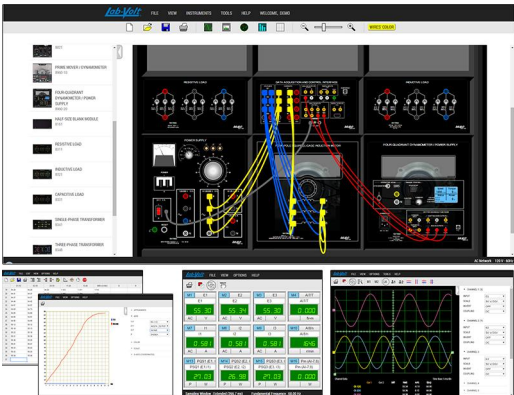

The Electromechanical Systems Simulation Software (LVSIM®-EMS) is a simulation software that covers the same courseware as the following systems:

- Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1
- DC and AC Power Circuits Training System, Model 8010-1
- Electromechanical Training System, Model 8010-9
- AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given

exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.


LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows® personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window

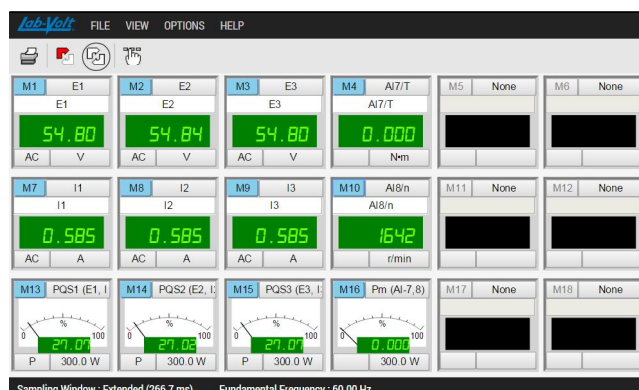

The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

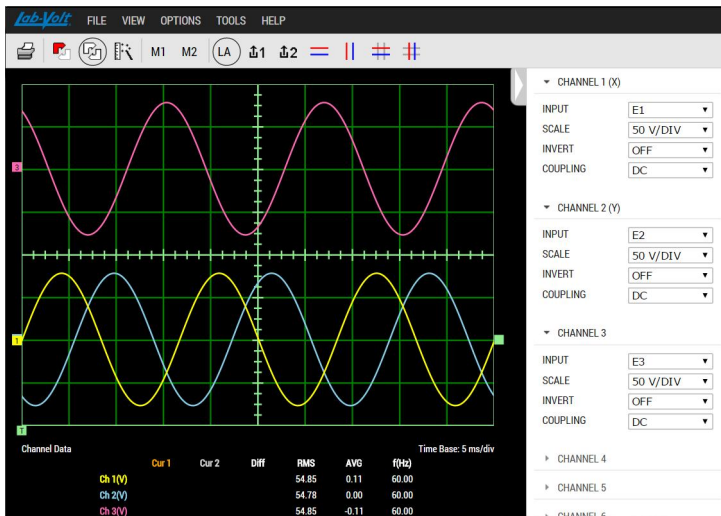

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed

in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.


Phasor Analyzer

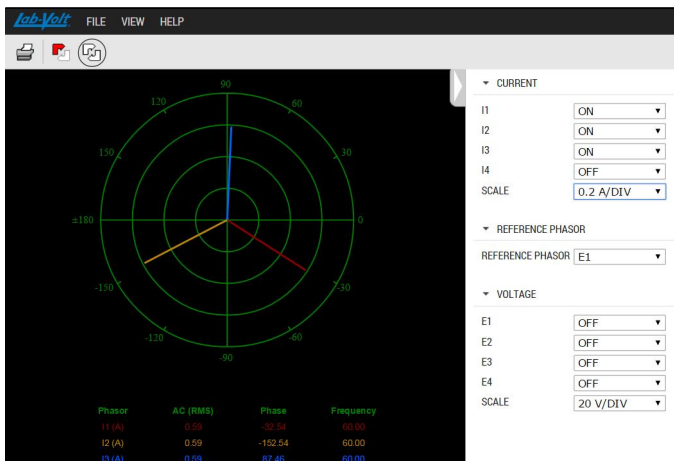

The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.


Harmonic Analyzer

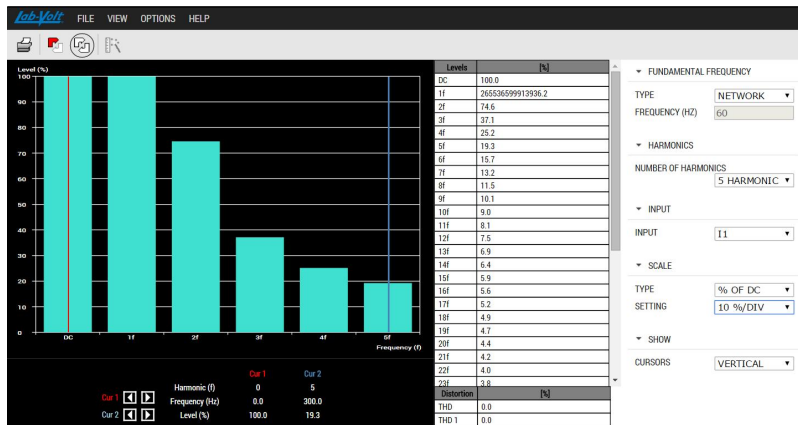

The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

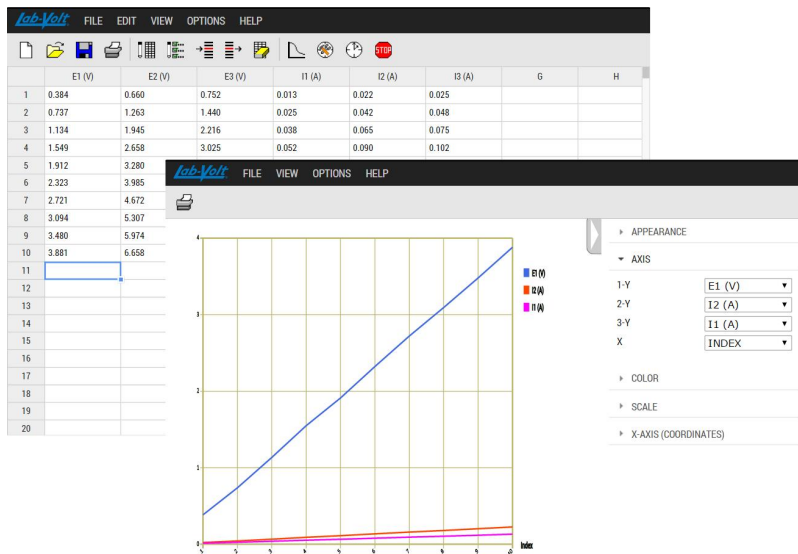

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators

Features & Benefits

- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	

Parameter	Value
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

Electromechanical Systems Simulation Software (LVSIM[®]-EMS) - 5 Users Online, 1 year (Optional) 586974 (8972-A0)



The Electromechanical Systems Simulation Software (LVSIM[®]-EMS) is a simulation software that covers the same courseware as the following systems:

Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1

DC and AC Power Circuits Training System, Model 8010-1

Electromechanical Training System, Model 8010-9

AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.

LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows[®] personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window



The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

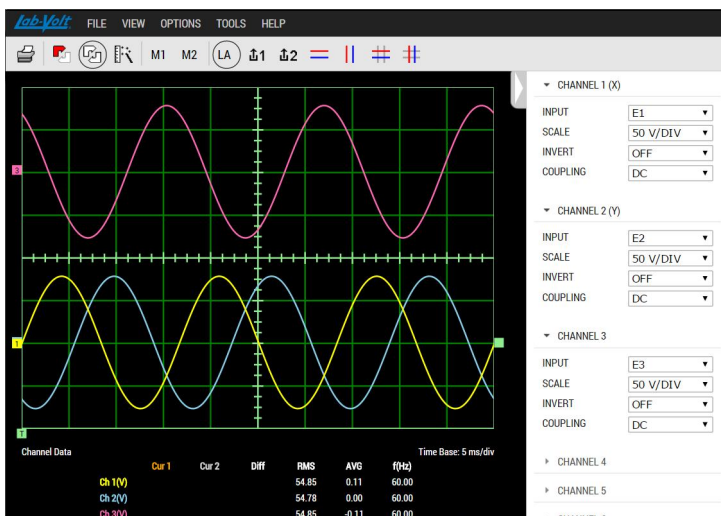

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed


in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.

Phasor Analyzer

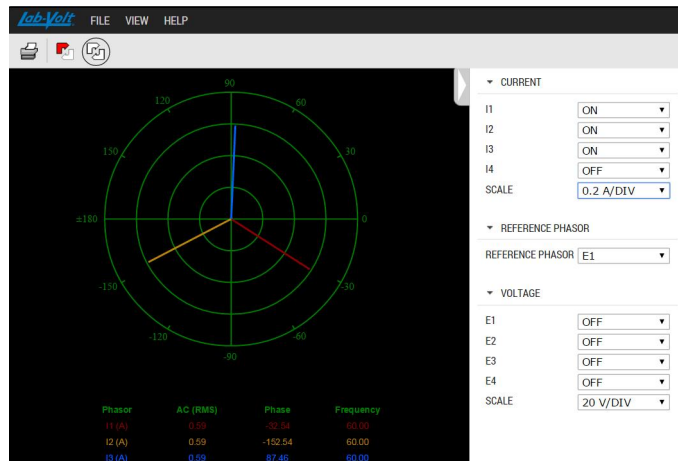

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.

Harmonic Analyzer

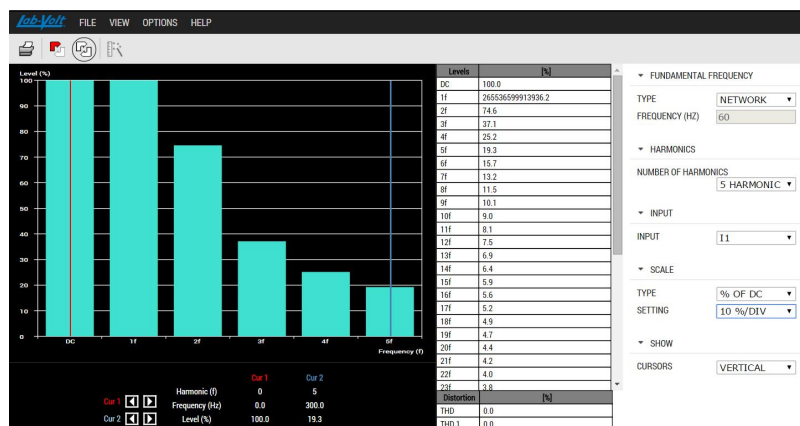


The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

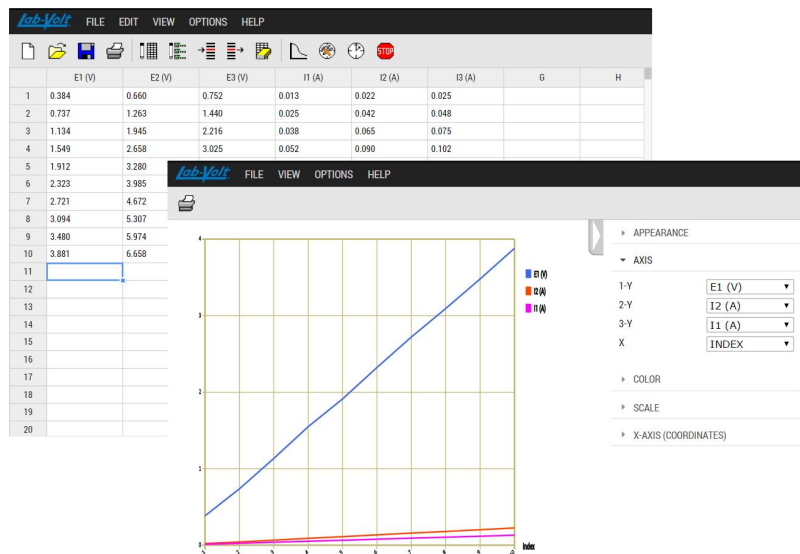

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators


Features & Benefits

- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

Electromechanical Systems Simulation Software (LVSIM[®]-EMS) - 10 Users Online, 1 year (Optional) 586977 (8972-B0)

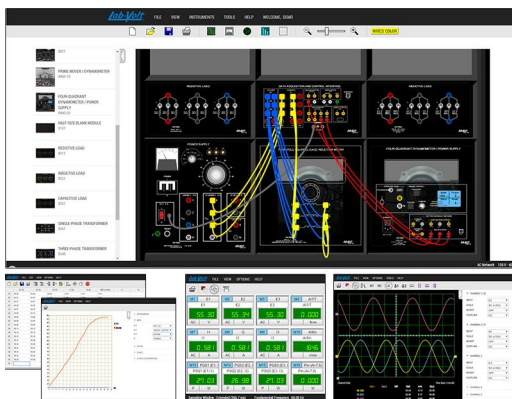

The Electromechanical Systems Simulation Software (LVSIM[®]-EMS) is a simulation software that covers the same courseware as the following systems:

Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1

DC and AC Power Circuits Training System, Model 8010-1

Electromechanical Training System, Model 8010-9

AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All

modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.

LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows® personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window



The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

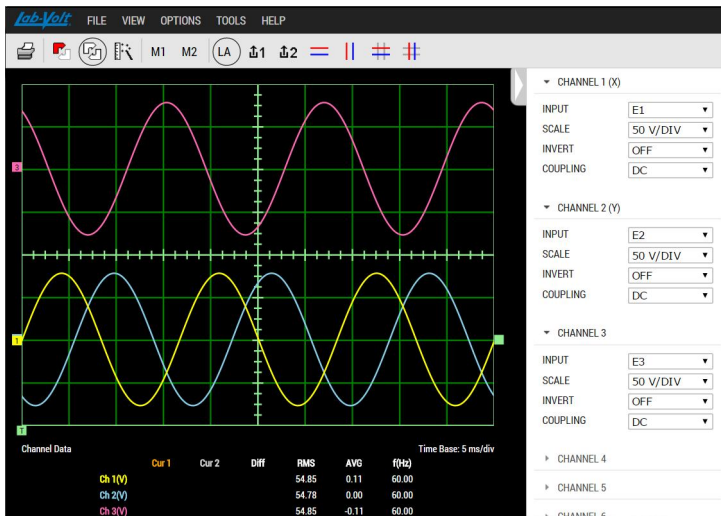

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed

in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.


Phasor Analyzer

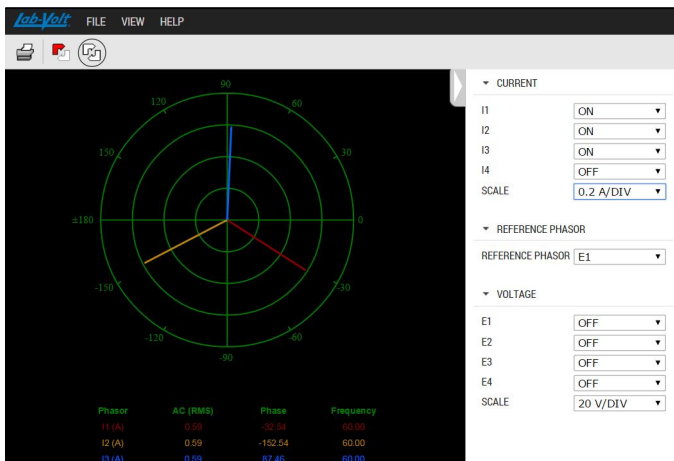

The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.


Harmonic Analyzer

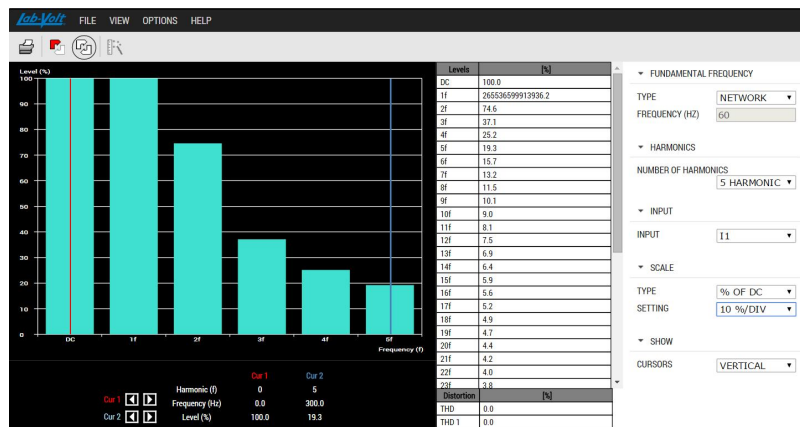

The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

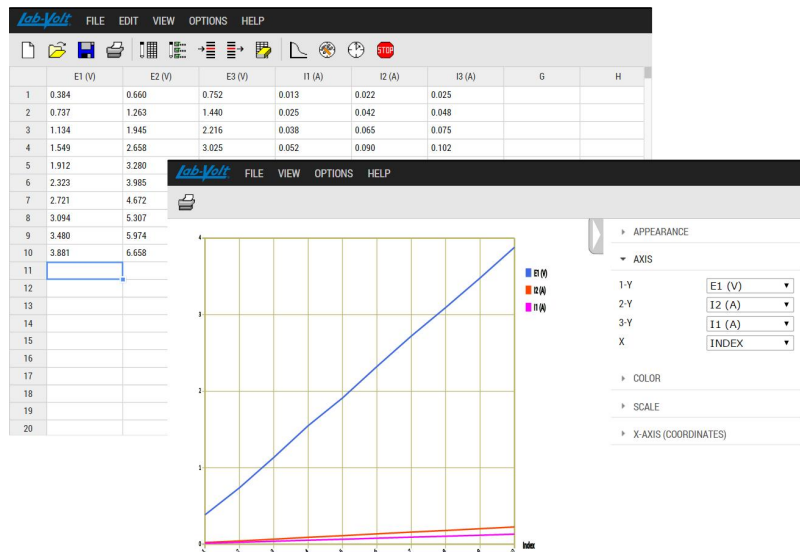

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators

Features & Benefits


- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	

Parameter	Value
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

Electromechanical Systems Simulation Software (LVSIM[®]-EMS) - 15 Users Online, 1 year (Optional) 586980 (8972-C0)

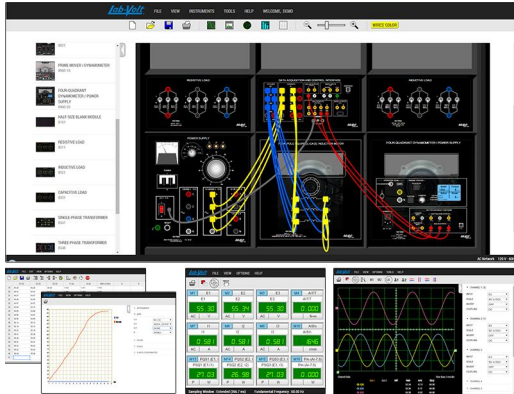

The Electromechanical Systems Simulation Software (LVSIM[®]-EMS) is a simulation software that covers the same courseware as the following systems:

Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1

DC and AC Power Circuits Training System, Model 8010-1

Electromechanical Training System, Model 8010-9

AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.

LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows[®] personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window



The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

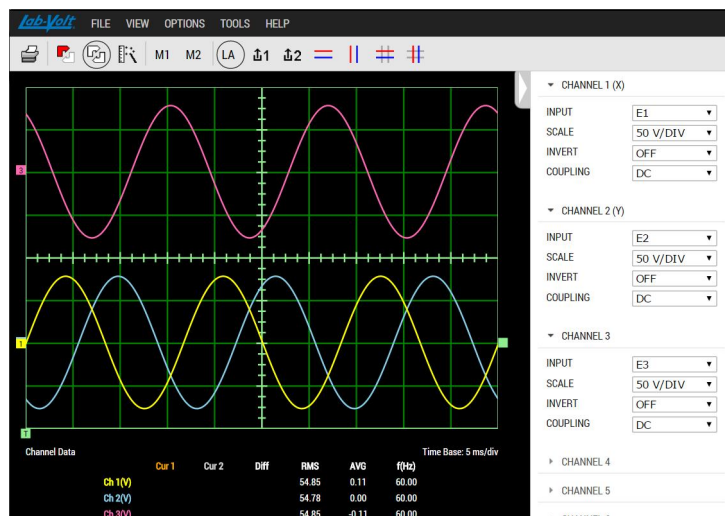

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed

in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.


Phasor Analyzer

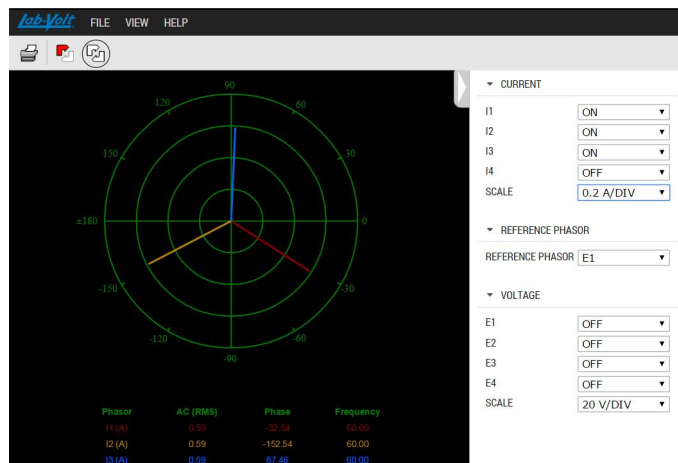

The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.


Harmonic Analyzer

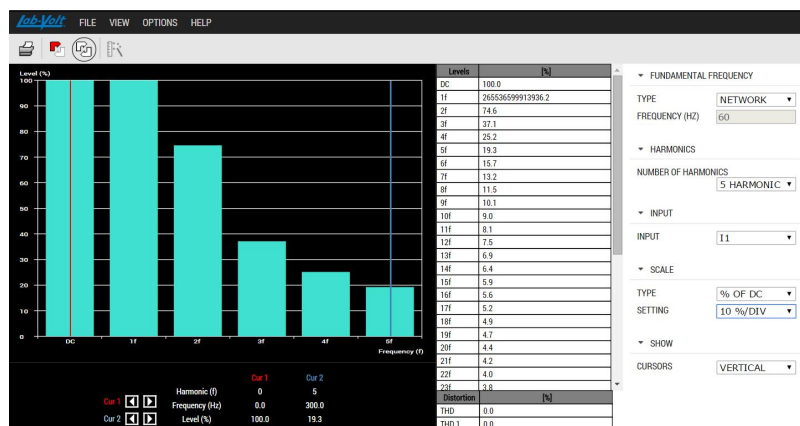

The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

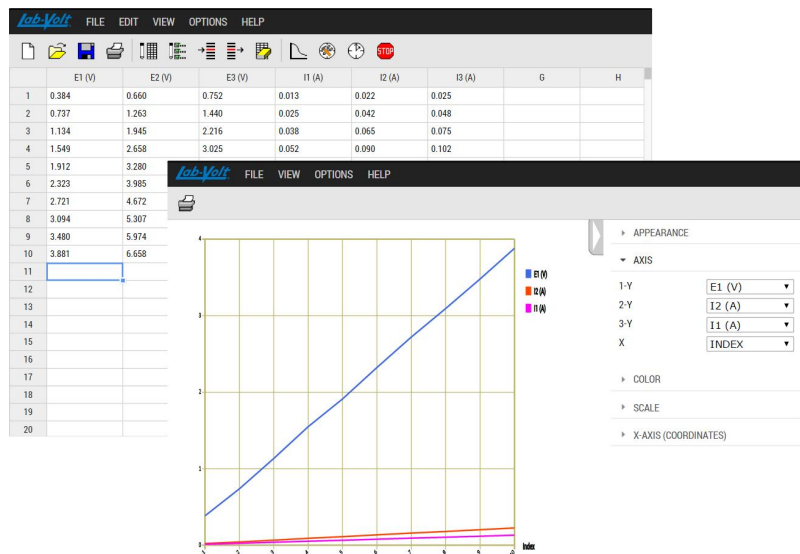

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators

Features & Benefits

- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

Electromechanical Systems Simulation Software (LVSIM[®]-EMS) - 20 Users Online, 1 year (Optional) 586983 (8972-D0)



The Electromechanical Systems Simulation Software (LVSIM[®]-EMS) is a simulation software that covers the same courseware as the following systems:

Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1

DC and AC Power Circuits Training System, Model 8010-1

Electromechanical Training System, Model 8010-9

AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All

modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.

LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows® personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window



The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

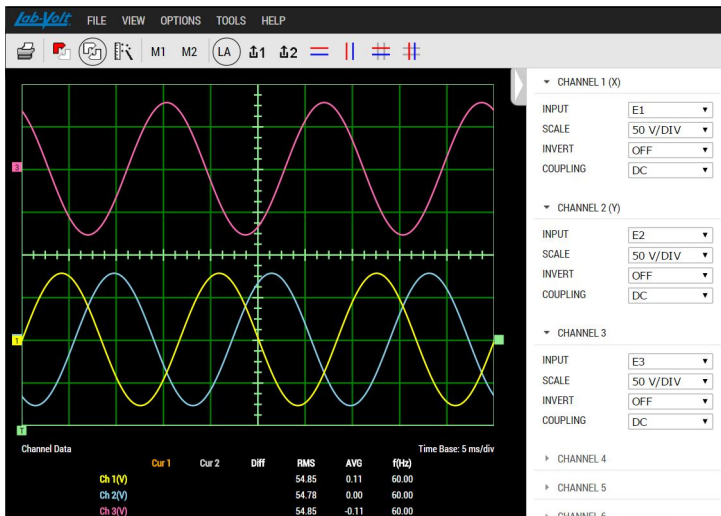

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed

in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.


Phasor Analyzer

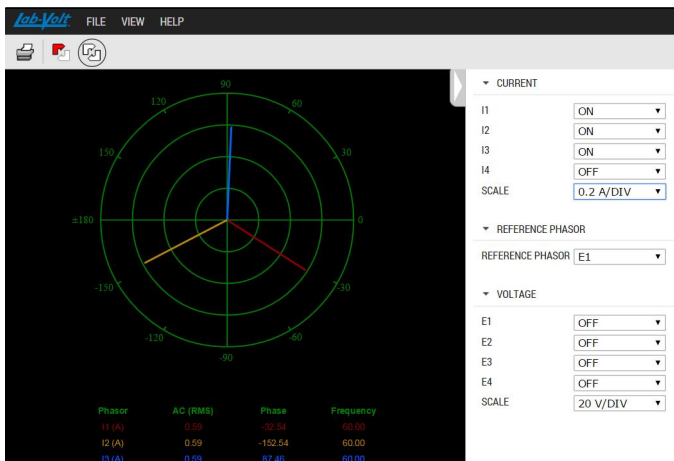

The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.


Harmonic Analyzer

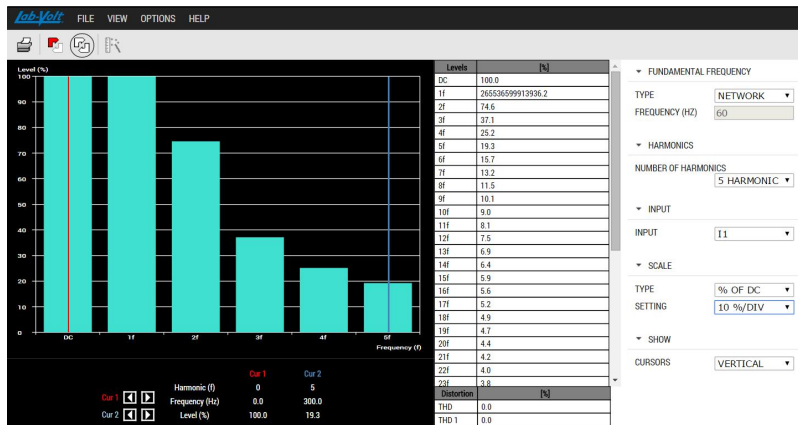

The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

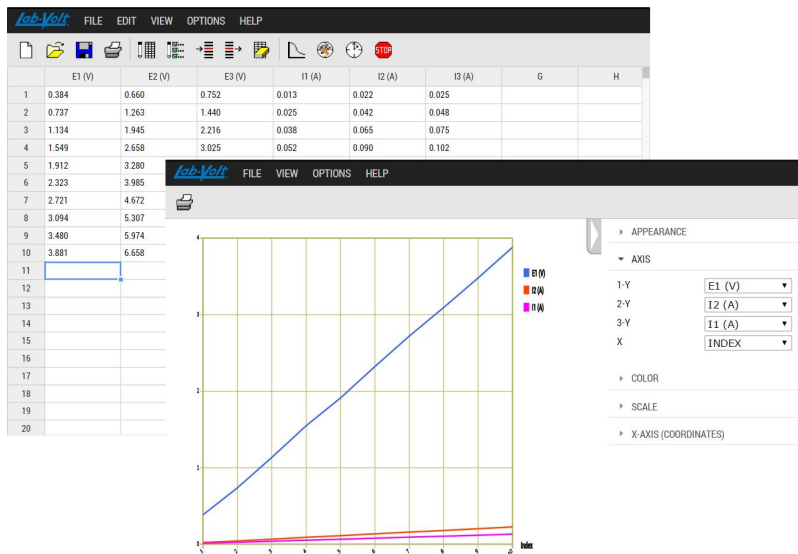

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators

Features & Benefits


- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	

Parameter	Value
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

Electromechanical Systems Simulation Software (LVSIM[®]-EMS) - 25 Users Online, 1 year (Optional) 586986 (8972-E0)

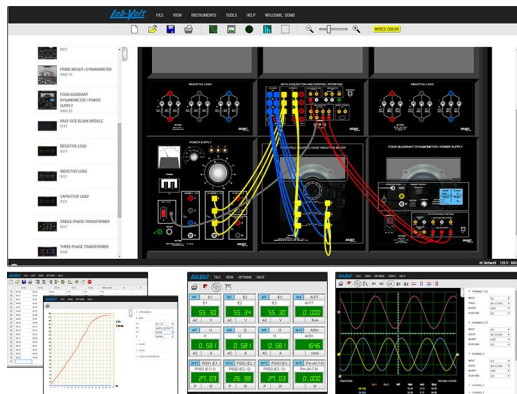

The Electromechanical Systems Simulation Software (LVSIM[®]-EMS) is a simulation software that covers the same courseware as the following systems:

Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1

DC and AC Power Circuits Training System, Model 8010-1

Electromechanical Training System, Model 8010-9

AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.

LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows[®] personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window



The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

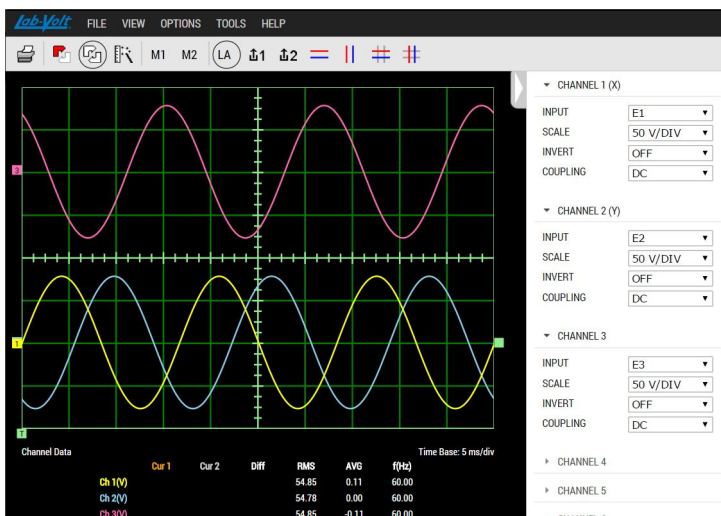

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed

in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.

Phasor Analyzer

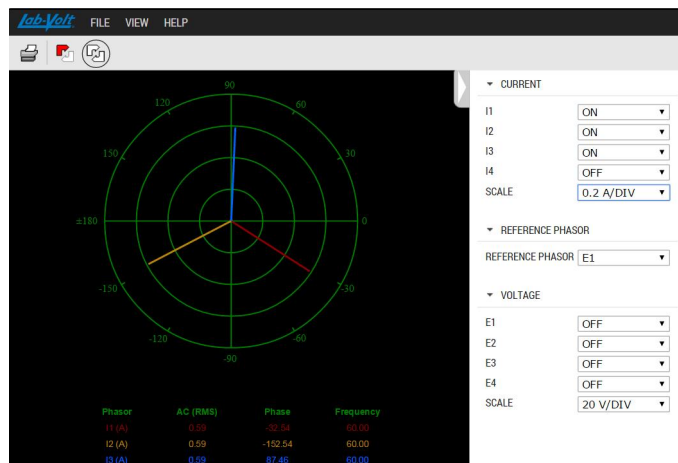

The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.


Harmonic Analyzer



The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

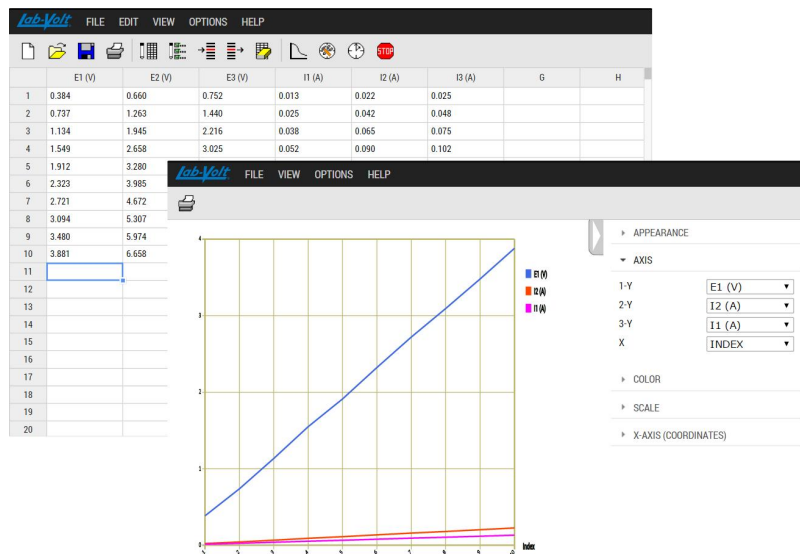

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators

Features & Benefits

- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

Electromechanical Systems Simulation Software (LVSIM[®]-EMS) - 30 Users Online, 1 year (Optional) 586989 (8972-F0)



The Electromechanical Systems Simulation Software (LVSIM[®]-EMS) is a simulation software that covers the same courseware as the following systems:

Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1

DC and AC Power Circuits Training System, Model 8010-1

Electromechanical Training System, Model 8010-9

AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All

modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.


LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows® personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window

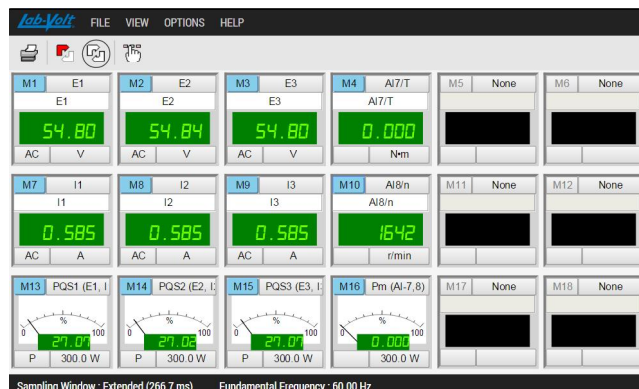

The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

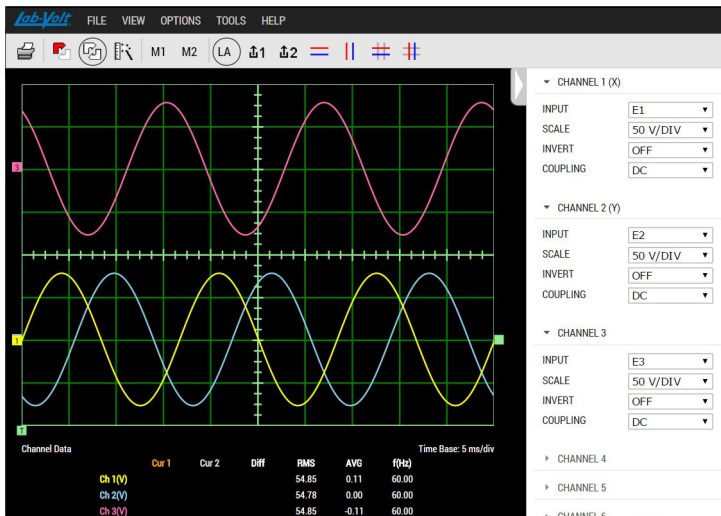

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed

in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.


Phasor Analyzer

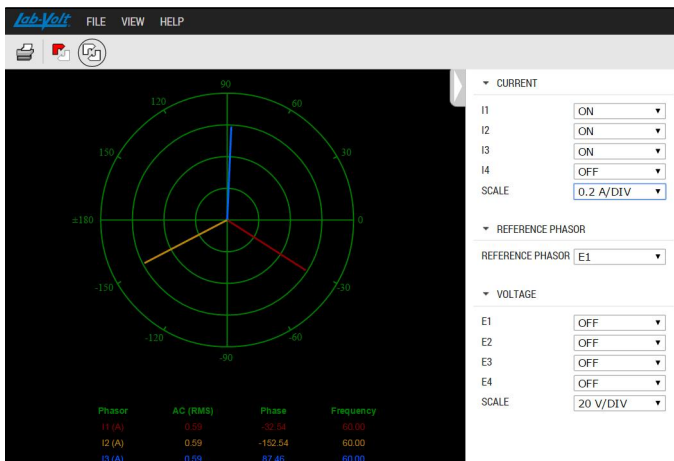

The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.


Harmonic Analyzer

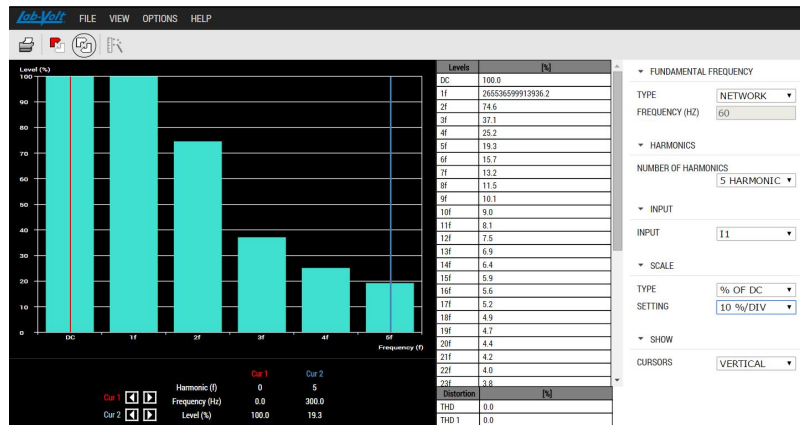

The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

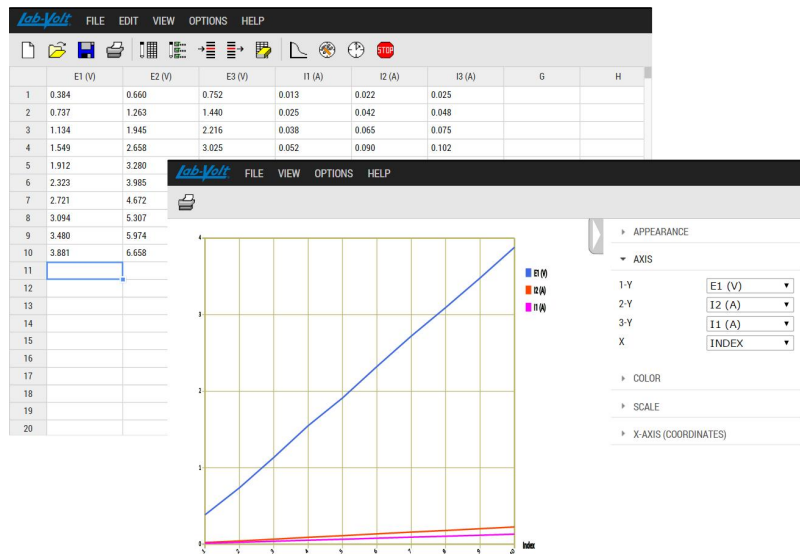

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators

Features & Benefits


- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	

Parameter	Value
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

Electromechanical Systems Simulation Software (LVSIM[®]-EMS) - 35 Users Online, 1 year (Optional) 586992 (8972-G0)

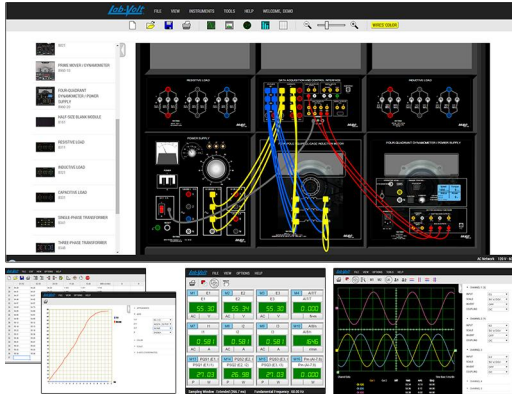

The Electromechanical Systems Simulation Software (LVSIM[®]-EMS) is a simulation software that covers the same courseware as the following systems:

Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1

DC and AC Power Circuits Training System, Model 8010-1

Electromechanical Training System, Model 8010-9

AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.

LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows[®] personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window



The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

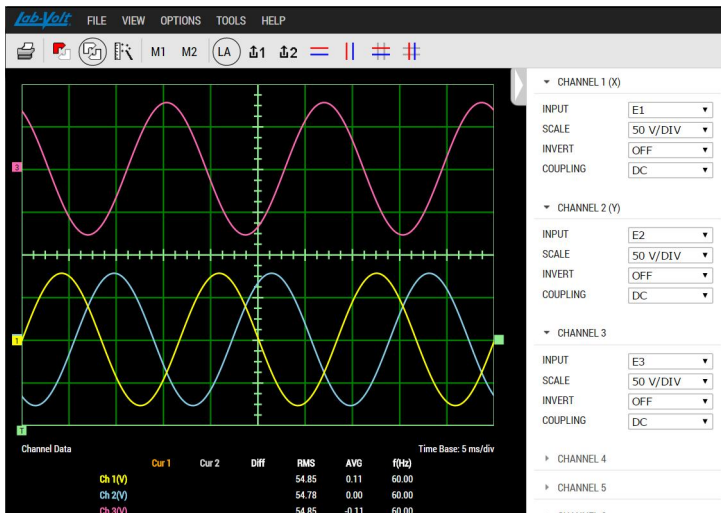

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed

in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.

Phasor Analyzer

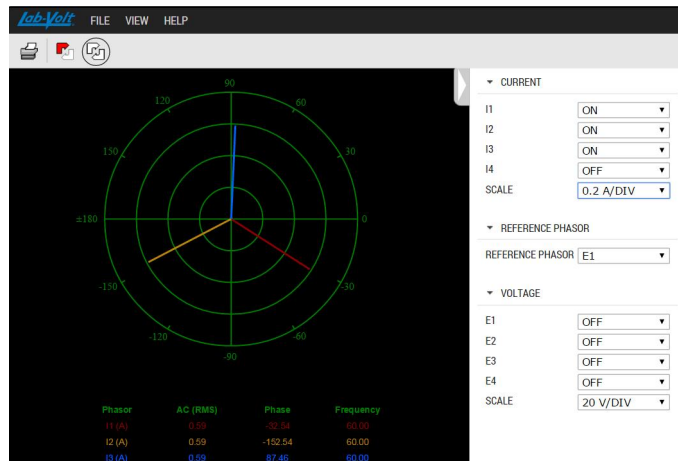

The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.


Harmonic Analyzer



The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

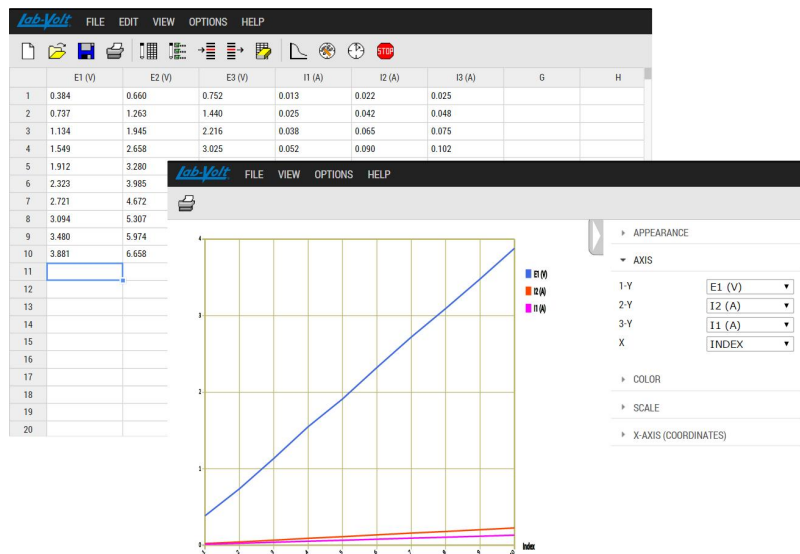

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators

Features & Benefits

- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

Electromechanical Systems Simulation Software (LVSIM[®]-EMS) - 40 Users Online, 1 year (Optional) 586995 (8972-H0)



The Electromechanical Systems Simulation Software (LVSIM[®]-EMS) is a simulation software that covers the same courseware as the following systems:

Computer-Assisted 0.2 kW Electromechanical Training System, Model 8006-1

DC and AC Power Circuits Training System, Model 8010-1

Electromechanical Training System, Model 8010-9

AC Power Transmission Training System, Model 8010-B

All workbooks parts of the systems above are available in the navigation menu of LVSIM-EMS for online consultation. To obtain the printing rights, Campus Licenses for each are

available and must be ordered separately.

With LVSIM-EMS, all the standard EMS laboratory equipment is replaced by images of the actual EMS modules that students can manipulate on the computer screen. Students can identify and set up equipment for a given exercise, make the necessary connections between the virtual EMS modules, and verify the connections made without the need for actual EMS equipment.

Sophisticated mathematical models fully simulate the electrical and mechanical characteristics of all the actual EMS modules: power supplies, motors, generators, transformers, electrical and mechanical loads, etc. All

modules simulated in the LVSIM-EMS software feature the same front panel information as the actual EMS modules. Short-circuit connections in the virtual equipment setup cause the virtual circuit-breaker protection to trip. This trip condition is clearly indicated on the virtual EMS modules.

Used either as a complement to the actual EMS laboratory equipment, or as a stand-alone product, LVSIM-EMS is a cost-effective tool that enables students to perform the same exercises as in the courseware of the above-mentioned training systems. When used as a stand-alone package, the LVSIM-EMS software allows students to perform hands-on activities related to electrical power and machines, including active, reactive, and apparent power, phasors, ac/dc motors and generators, three-phase circuits, and transformers.

LVSIM-EMS is a web-browser based application **available in three different configurations**. The simulation software can either be installed locally on a Windows® personal computer (local version), on a Windows server (network version), or accessed directly online through the labvolt.com website at lvsim.labvolt.com (online version). Both network and local versions are delivered with perpetual license for the current version. The online version is delivered as a annual license with possibility to expand for more years.

Please visit <https://lvsim.labvolt.com> and try the online version!

Virtual Instrumentation

LVSIM-EMS comprises a set of conventional and specialized instruments that can be used for measuring, observing, and analyzing electrical and mechanical parameters in electric power systems and power electronic circuits. Each instrument appears as a window on the computer screen. The conventional instruments include ac/dc voltmeters and ammeters, power meters, and an eight-channel oscilloscope. The specialized instruments include a six-channel phasor analyzer, a harmonic analyzer, torque, speed, and mechanical power meters, and user-programmable meters. The software is also provided with data-recording and graph-plotting capabilities. The various instruments are briefly described in the next section of this datasheet.


Metering Window



The Metering window displays up to eighteen meters, which can be configured individually for measuring ac/dc voltage and current, electrical power (active, reactive, and apparent), torque, speed, mechanical power, etc. The voltage and current meters have several modes of operation that allow measurement of the mean (dc) value, RMS value, crest factor, RMS value of a particular harmonic (up to the 15th

value), RMS value of the harmonics, and total harmonic distortion (THD). Six of the eighteen meters are user-programmable and give access to a larger variety of functions for measurement of power factor, efficiency, impedance, frequency, energy, phase shift, etc. The layout of the meters in the Metering window is user-customizable.


Oscilloscope

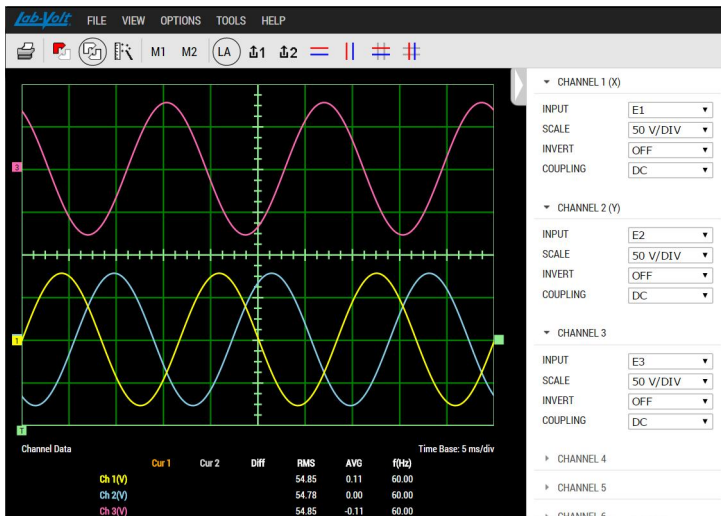

The Oscilloscope displays up to eight waveforms simultaneously, each of a different color for easy identification. Each channel has independent vertical controls similar to those found on conventional oscilloscopes. An automatic scale-setting function allows the sensitivity of each channel to be set automatically according to the magnitude of the observed parameter. The time base and trigger controls are similar to those found on most oscilloscopes. The RMS value, average value, and frequency of each observed parameters can be displayed

in the Oscilloscope window. Two vertical cursors can be activated to perform precise measurements at particular points on the displayed waveforms. The Oscilloscope toolbar includes two memory buttons for saving displayed waveforms.

Phasor Analyzer

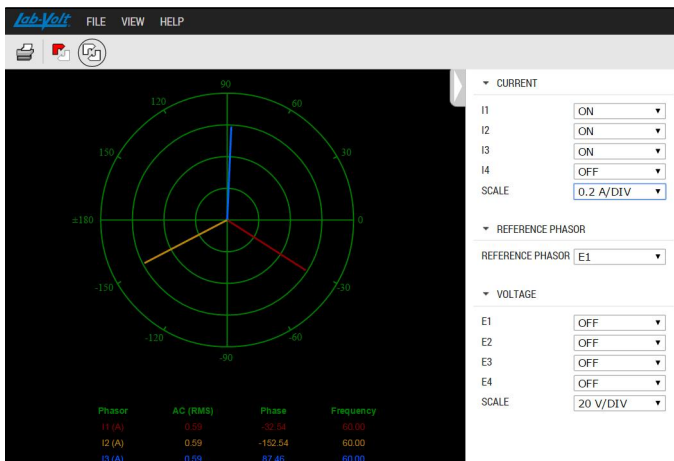

The Phasor Analyzer displays the phasors related to the measured voltages and currents. The amplitude and phase angle of each voltage and current is clearly represented by the orientation and length of their corresponding phasors, allowing easy comparison between the displayed parameters. This produces a unique and dynamic display of the voltages and currents in a circuit (especially in three-phase circuits) that cannot be obtained with conventional

instruments. The RMS value, phase angle, and frequency of the voltage or current related to each phasor is displayed in the Phasor Analyzer window.


Harmonic Analyzer



The Harmonic Analyzer allows observation and analysis of the harmonic components in the measured voltages and currents. The fundamental frequency can be manually set to the ac power network frequency or automatically set to the frequency of the fundamental component of the selected voltage or current. The harmonic components of the selected voltage or current can be displayed using a vertical scale

graduated in either absolute or relative values. A group of data displays in the Harmonic Analyzer indicates the values of the dc component of the selected voltage or current, as well as the total harmonic distortion (THD). Vertical and horizontal cursors can be displayed to perform precise measurements at particular points on the display. Since the equipment simulated by LVSIM-EMS produces only dc and sinusoidal ac signals (without harmonics), the Harmonic Analyzer, which is intended for use with devices that produce harmonics, is not often used with LVSIM-EMS.

Data Table and Graph Windows

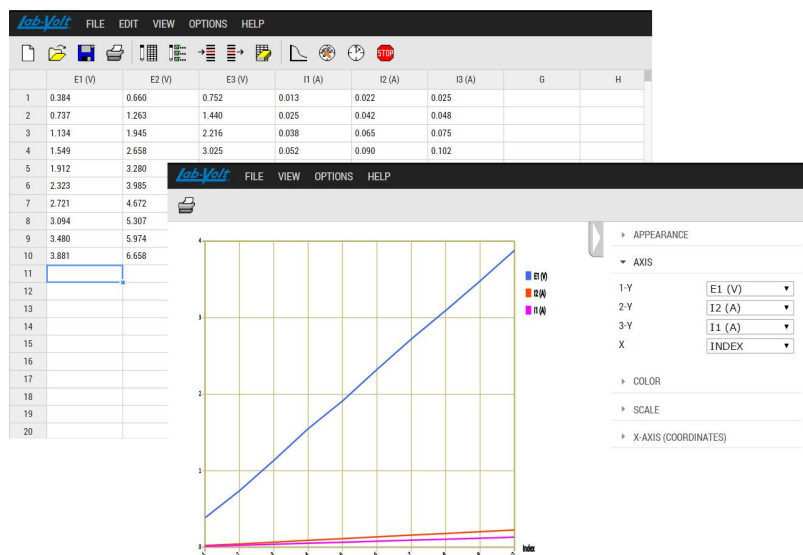

The values indicated by the various meters in the Metering window, as well as values measured by the other instruments, can be recorded in the Data Table window with a click of the mouse. The values recorded in the Data Table can be saved to a file (ASCII-formatted file). The recorded data can also be used to plot graphs by selecting which parameter(s) to plot in the Graph window. This allows lab results to be plotted quickly and easily. More sophisticated graphs can be created by exporting the contents of the Data Table window to any spreadsheet program, such as

Microsoft Excel®, directly through the Windows Clipboard.

Software Protection and Licensing

The local and network version provides a perpetual licence and the online access version provides a annual licence (additional years can be purchased when ordering).

The local and network version of LVSIM-EMS are copy-protected by means of a hardlock security device. When LVSIM-EMS detects the security device, students have complete access to all measuring functions of the virtual instruments and other protected features of LVSIM-EMS, as well as to the student manuals included with the simulation software. Note that students are allowed to copy the software onto their personal computer to allow them to prepare laboratories in advance.

Two different security devices are available for LVSIM-EMS: a single-user hardlock key, which can be inserted in the USB port of the user's computer, and a multiple-user hardlock key, which can be inserted in the USB port of the network server or any computer in the same network. Once the hardlock key is active on the network, the other computer will see the available licences. Alternately, the multiple-user hardlock key can be inserted in a USB port inside the server using a circuit board with edge-type connector (provided with the key) that can be installed in a PCI expansion slot of the server.

The multiple-user hardlock key can be installed in servers running under one of the following Microsoft® operating systems: Windows 7, Windows 8, Windows 10, Windows 2008 Server, and Windows 2013 Server. As its name indicates, the multiple-user hardlock key allows several users of a network to run LVSIM-EMS simultaneously. Different versions of LVSIM-EMS are available, each allowing a particular number of users.

Online Edition

The online version of LVSIM-EMS is accessible directly via the internet, and requires no software installation nor any update since the latest version of the software is always available. The online version of LVSIM-EMS also includes a demo mode that allows students to prepare laboratories in advance by familiarizing with the equipment and connections. The demo mode does not require any login.

Computer Requirements

Local and Network Versions:

- One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)

Online Version:

- Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

List of Manuals

Description	Manual number
Electromechanical Systems Simulation Software (User Guide) _____	583879 (20858-E0)
Computer-Based Instruments for EMS (User Guide) _____	584396 (36221-E0)

Table of Contents of the Manual(s)

Electromechanical Systems Simulation Software (User Guide) (583879 (20858-E0))

- 1 Overview of LVSIM-EMS
- 2 Installing the Security Device
- 3 Installing and Running LVSIM-EMS

Computer-Based Instruments for EMS (User Guide) (584396 (36221-E0))

- 1 Familiarization with the Metering Window and the Data Table
- 2 Familiarization with the Oscilloscope
- 3 Familiarization with the Phasor Analyzer
- 4 Familiarization with the Harmonic Analyzer
- 5 Measuring Three-Phase Power Using the Metering Window

Topic Coverage

- Fundamentals for Electric Power Technology
- Alternating Current
- Capacitors in AC Circuits
- Inductors in AC Circuits
- Power, Phasors, and Impedance in AC Circuits
- Three-Phase Circuits
- Special Transformer Connections
- Single- and three-Phase Transformers
- Fundamentals for Rotating Machines
- DC Motors and Generators
- Special Characteristics of DC Motors
- AC Induction and Synchronous Motors
- Three-Phase Synchronous Generators

Features & Benefits

- Replicates the Electromechanical Training System, enabling students to perform actual experiments using virtual equipment
 - Install, move, and remove EMS modules in and from the workstation
 - Modify module connections at any time and change the color of wires
 - Install a timing belt between two EMS machines
 - Verify module connections using a tool that highlights all wires connected to a same circuit point
 - Perform measurements of voltage, current, power, speed, torque, impedance, resistance, reactance, and frequency and display the values on digital or analog meters
 - Record measurements in a data table and plot graphs using the recorded data
 - Display waveforms on a multi-channel oscilloscope and ac voltages and currents as phasors
- Students prepare for laboratories in advance using virtual equipment, thereby decreasing the time they require to perform the exercises using actual equipment
- Decreases the quantity of actual equipment required per student
- Allows students to practice with EMS equipment operation and connection at home on a personal computer

Specifications

Parameter	Value
Computer Requirements	

Parameter	Value
Local and Network versions	One (1) USB 2.0 port for the security dongle, Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8), basic dual core CPU, Google Chrome web browser installed (for better experience)
Online version	Microsoft Windows 10 operating system recommended (compatible with Windows 7 and 8 but not fully compatible with mobile devices), basic dual core CPU, internet access (bandwidth usage of 50 KB/s maximum), Google Chrome web browser installed (for better experience)

SCADA for LVDAC-EMS (Optional) 8094377 (8973-00)



Education in electrical engineering at Festo Didactic is largely based on our unique electric power technology training platform, which combines hardware, software, and courseware to allow study of electrical energy.

At the heart of the systems are the data acquisition and control interface (DACI) and the four-quadrant dynamometer/power supply. When used in combination with LVDAC-EMS software program, students have access to a complete set of computer-based instruments to measure, observe, analyze, and control electrical and mechanical parameters of a workstation on their computers.

Our state-of-the-art training platform has just been enhanced through the integration of a new SCADA-EMS feature, a software program designed to run in combination with LVDAC-EMS. SCADA-EMS transforms LVDAC-EMS and the workstation's computer into a local workstation that can be monitored and controlled over a local network from a supervisory computer. Using the OPC Server protocol, SCADA-EMS enables users to design their own interface by calling the different applications running on the local workstations.

SCADA-EMS enhances LVDAC-EMS by adding several new features. You will be able to:

- Collect data from local workstations.
- Observe and control one or more stations from one or more supervisory stations.
- Remotely control several applications in your lab.
- Use a workstation in a different room to make real demonstrations over the network in your classroom without having to bring your workstation to class.
- Introduce students to the fundamentals of SCADA in a smart grid context.
- Recreate a complete grid with several different applications running.

The SCADA-EMS software program can be downloaded from our website. This locked version can be unlocked by a USB dongle. A dongle unlocks five workstations; order as many dongles as required.

Before ordering the dongles, please install:

- LVDAC-EMS (version 3.19 or later) on all your workstation computers.
- SCADA-EMS (1.01 or later) on the workstation computers you want to use to build up your SCADA application.

Contact your sales representative about order details and options.

LVDAC-EMS

The LVDAC-EMS software is a freeware which can be downloaded anytime from the Festo Didactic website (www.labvolt.com). The LVDAC-EMS software is a user-friendly tool that facilitates the use of the various functions which can be implemented with USB peripherals such as the Data Acquisition and Control Interface (DACI), LabVolt Series 9063, and the Four-Quadrant Dynamometer / Power Supply, LabVolt Series 8960.

The LVDAC-EMS software also includes a firmware update for the DACI. When a DACI is connected to a newer version of LVDAC-EMS, the user can easily update the module using a simple update wizard.

LVDAC-EMS Functions

The functions that are currently available for the DACI, Model 9063, are described below. All functions can be activated in any DACI by purchasing a license for that specific function and then performing the upgrade procedure on the DACI. New functions will be added to this datasheet as they become available.


Instrumentation Functions

The instrumentation functions of LVDAC-EMS replace a multitude of actual data acquisition devices (e.g., voltmeters, ammeters, oscilloscopes, synchroscopes) with a series of computer-based instruments that display the data measured by the DACI.

Features & Benefits

- Monitor and control several workstations from one (or more) supervisory computer(s)
- Use OPC server protocol to communicate between the different workstations
- Include your own pictures and schematics
- Introduce SCADA in existing EMS laboratories

Software Development Kit (SDK) (Optional) 581459 (9069-90)

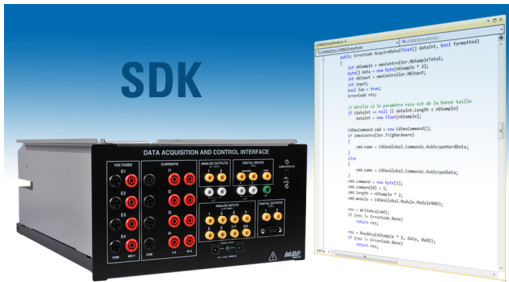

The DACI SDK (Software Development Kit) offers the possibility to control various inputs and outputs of the Data Acquisition and Control Interface using third-party rapid prototyping software like Mathworks® MATLAB, National Instruments® LabVIEW, Microsoft Visual Studio and other programming tools that support Microsoft® .NET Framework 4.0. The SDK gives users the possibility to build their own advanced functions using the Data Acquisition and Control Interface.

The SDK includes the following:

- DLL files for communication with the DACI
- Documentation related to the functions
- MATLAB (2010 or later), LabVIEW (2009 or later) and Visual Studio C# (2012 or later) example programs
- Binaries from the C# example. This application can be used to verify that your PC configuration is compatible with the SDK.

The following functions are available using the SDK:

- Acquisition through the voltage and current inputs

- Acquisition through the encoder inputs
- Acquisition through the analog inputs
- Control of the digital outputs
- Control of the analog outputs

Important Notice: One DAPI SDK (Software Development Kit) must be ordered for each Data Acquisition and Control Interface to unlock the SDK features.

Reflecting the commitment of Festo Didactic to high quality standards in product, design, development, production, installation, and service, our manufacturing and distribution facility has received the ISO 9001 certification.

Festo Didactic reserves the right to make product improvements at any time and without notice and is not responsible for typographical errors. Festo Didactic recognizes all product names used herein as trademarks or registered trademarks of their respective holders. © Festo Didactic Inc. 2025. All rights reserved.

Festo Didactic SE

Rechbergstrasse 3
73770 Denkendorf
Germany

P. +49(0)711/3467-0
F. +49(0)711/347-54-88500

Festo Didactic Inc.

607 Industrial Way West
Eatontown, NJ 07724
United States

P. +1-732-938-2000
F. +1-732-774-8573

Festo Didactic Ltée/Ltd

675 rue du Carbone
Québec QC G2N 2K7
Canada

P. +1-418-849-1000
F. +1-418-849-1666

www.labvolt.com

www.festo-didactic.com